


EMERGENCY LIGHT




- Emergency LED exit sign-ALL IN ONE
- Viewing distance 24m
- Low stand-by power consumption
- Mode of operation is maintained
- PC & Acrylic (850°C V0 fire-safe material)
- Emergency monitoring within Bluetooth system
- High quality LiFePO<sup>4</sup> battery
- Nominal power and lumen can be customized

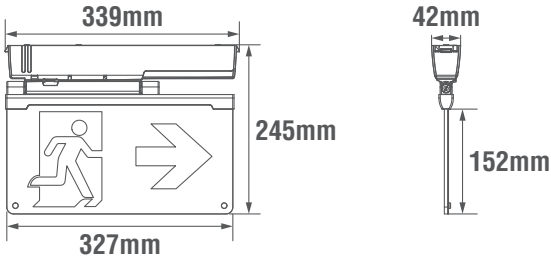

Detachable / replaceable direction sign film




EMERGENCY LIGHT



Emergency Management & Maintenance via Koolmesh Bluetooth APP / Web Platform


Emergency on APP

- Emergency logs and battery status check
- Self-test scheduling
- Batch commissioning. Enable users to copy all the parameters or use the system default profile.

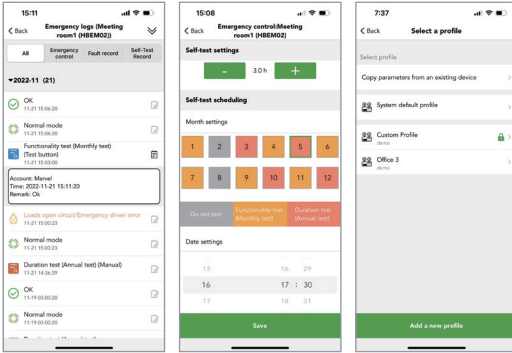

Emergency on Web Platform

- Self-test records
- Self-test scheduling
- Email notification when fault is detected
- Fault log
- Emergency report generation & download

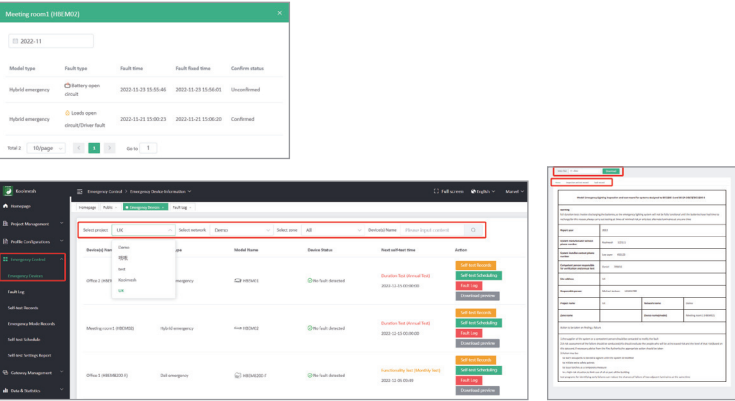

Specification

Input Voltage	220-240VAC
Frequency	50/60Hz
Total Power Consumption Wattage/On-Mode Power	6W
Lumens (Total for Product)	180 lm
Color Temperature	6500K
CRI	>80
Emergency Mode	Maintained
Emergency Operation Time	3 hours
Emergency Output Power	4W
Emergency Output Lumen	180 lm
Self Test	Yes
Charging Time	24 hours
View Distance	24m

Battery Type	LiFePO <sup>4</sup>
Battery Package Spec.	6.4V 3.4Ah
Product Warranty	5 years
Operating Temperature	0 ~ 50°C
Operating RH%	10 ~ 80%
Housing Material	PC
Lens/Diffuser Material	PMMA
IP Rating	IP20
IK Rating	IK02
Standard	EN60598-2-22 / EN61347 / EN55015 / EN61000-3-2 / EN 62034
Lifespan	L70B50: 176,000h L80B10: 95,000h

Order Code

● Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Lumen	Dimension (mm)
DEX001	D339	6W				●	●				65K	180 lm	339*42*245