





Maat is the galvanized steel sheet industrial luminaire, professional and powerful. With long working life, low energy consumption and high lighting performance, it is optimal for areas where access to maintenance and service of luminaries is difficult, namely logistic centers, warehouses, large stores, production halls, sports facilities, garages, supermarkets, etc.

- 1 • Frame and ends: corrosion-resistant alu-zinc • Reflector: matt anodized aluminum
- 2 • Easy installation with innovative pivot function and hinged gear tray: open with a simple press, insert the cable, connect, then close again.
- 3 • Mounted directly onto the ceiling • Mounted on a horizontal carrying rope with a built-in mounting hook
- 4 • One cable entry in the middle, and one cable entry on each end
- 5 • 5-pole quick terminal block, with 5 x 2.5mm² through wiring.
- 6 • Optional selectable color temperature • Optional selectable power • Optional aluminum louver, decrease glare
- 7 • Wide choice of intelligent functions, with/without sensor, DALI, etc.

Photometrics

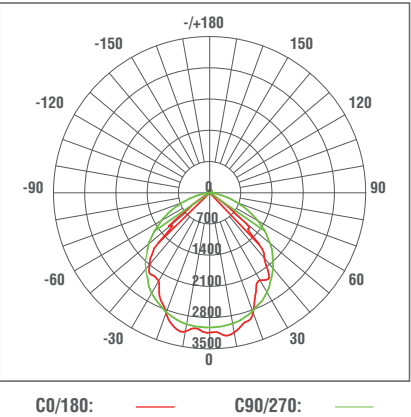

Dimension

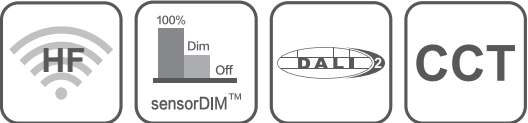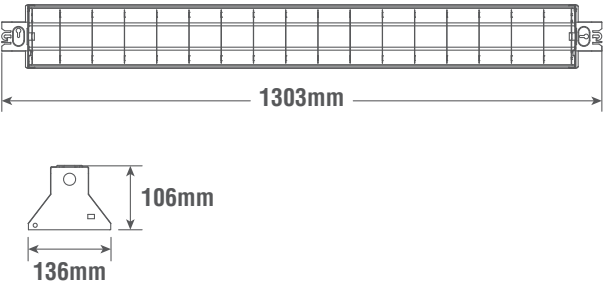

Lumen Output

Model	Lumen	Power	3000K	4000K	5000K
M1200	Standard Lumen	60W	110 lm/W	115 lm/W	120 lm/W
			6810 lm	6940 lm	7050 lm
M1200	High Lumen	60W	135 lm/W	140 lm/W	145 lm/W
			8220 lm	8400 lm	8580 lm

• Lumen may fluctuate between ± 10%. Customized higher lumen output available.

Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	100°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP23

Fitting Material	Alu-zinc & Iron Housing + PC Diffuser
Electrical Class	I
Standard Lifespan	L70B50: 64,000h
Premium Lifespan	L70B50: 148,000h L80B10: 78,000h
Standard	EN60598-2-1 / EN55015 / EN62778

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
MAT001	M1200	60W	●								40K	110 lm/W	L 1303 * W 136 * H106