





Ceto is an attractive cast aluminum luminaire, with indirect lighting that has peripheral luminous halo. The luminaire is ideal for exterior vandal resistant areas; it can be used as facade lighting and common areas in housing and profession.

- 1 • Cable entry from side and back • Through wiring from side to side
- 2 • IP65 water-proof • IK10 vandal-proof
- 3 • Optional selectable color temperature • Optional selectable power
- 4 • Ceiling / Wall mounted • Quick installation thanks to tiltable LED plate
- 5 • Powder coated paint finish • UV-proof diffuser
- 6 • Wide choice of intelligent functions, with/without sensor, emergency, DALI, etc.




Tiltable PCB Plate



Dimension

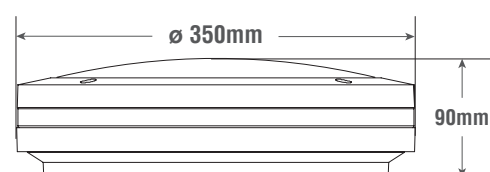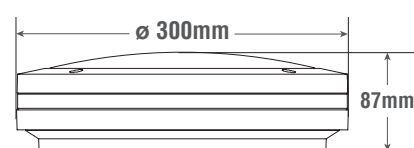

Photometrics

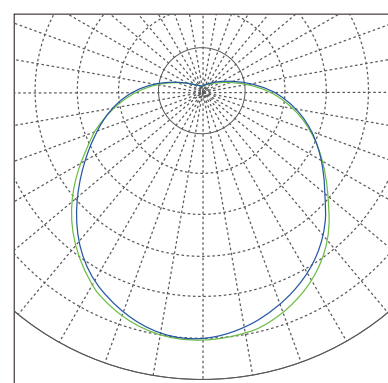

C0/C180: — C90/C270: —

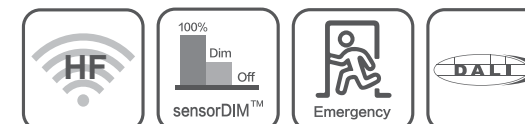

Lumen Output

Model	Power	3000K	4000K	5000K
		80 lm/W	85 lm/W	90 lm/W
AC300	18W	1440 lm	1510 lm	1590 lm
AC350	28W	2180 lm	2280 lm	2350 lm

• Lumen may fluctuate between $\pm 10\%$. Customized higher lumen output available.

Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	110°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP65
IK Rating	IK10
Fitting Material	Cast Aluminum

Electrical Class	I
Standard Lifespan	L70B50: 68,000h
Premium Lifespan	L70B50: 176,000h L80B10: 95,000h
Standard	EN60598-2-1 / EN55015 / EN62778 / EN60598-2-22
Emergency Lumen	200 ~ 400 lm
Battery	3h Duration

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
CET001	AC300	18W		●							40K	85 lm/W	∅ 300 * H 87
CET002	AC300	18W	●								40K	85 lm/W	∅ 300 * H 87
CET004	AC300	18W	●								30K	80 lm/W	∅ 300 * H 87
CET005	AC300	18W		●							30K	80 lm/W	∅ 300 * H 87