


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:8055.1x1 lm		
NAME: LS03-1500-2*20° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 130.55 lm/W			
MODEL		Imax(cd)	7022	S/MH(C0/180)	1.18
NOMINAL POWER(W)	60	LOR(%)	100.0	S/MH(C90/270)	0.77
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	8055.1	η UP,DN(C0-180)	3.6,46.4
NOMINAL FLUX(lm)	8055.1	CIE CLASS	DIRECT	η UP,DN(C180-360)	3.6,46.4
LAMPS INSIDE	1	η up(%)	7.1	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	221.7	η down(%)	92.9	CIBSE SHR MAX	0.65

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

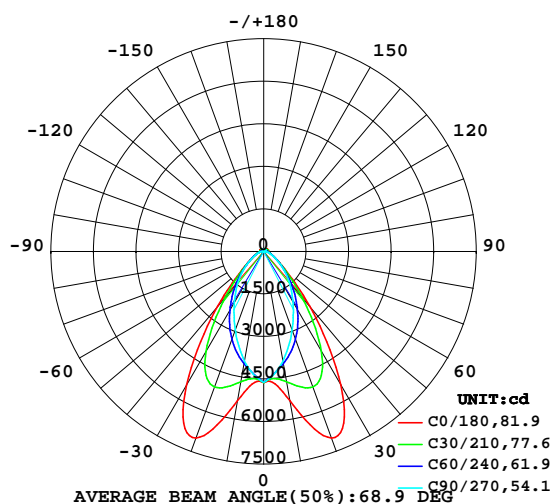

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

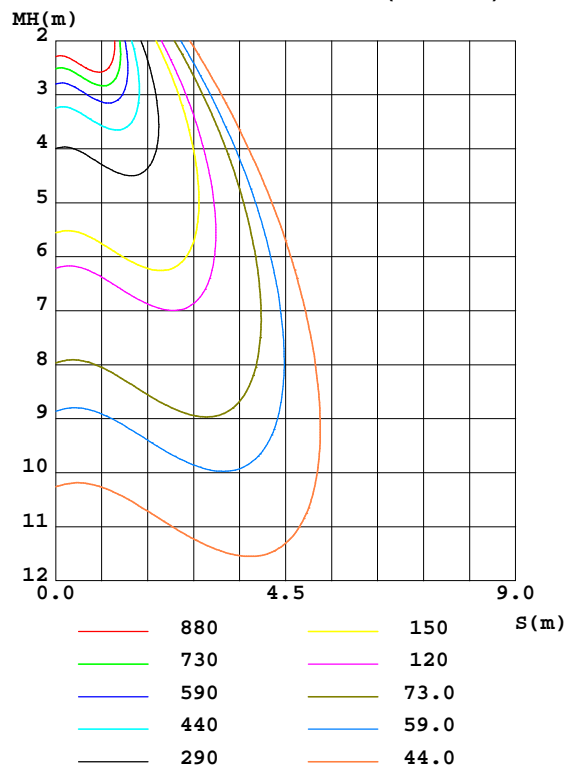

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	5341	4343	3930	4343	5341	4343	3930	4343	0- 10	424.5	424.5	5.27,5.27
20	7001	4187	2939	4187	7001	4187	2939	4187	10- 20	1271	1696	21,21
30	5440	3232	2080	3232	5440	3232	2080	3232	20- 30	1850	3546	44,44
40	2528	1826	1415	1826	2528	1826	1415	1826	30- 40	1625	5171	64.2,64.2
50	987.8	901.3	852.8	901.3	987.8	901.3	852.8	901.3	40- 50	1022	6192	76.9,76.9
60	477.1	480.1	465.8	480.1	477.1	480.1	465.8	480.1	50- 60	591.6	6784	84.2,84.2
70	272.1	274.9	247.4	274.9	272.1	274.9	247.4	274.9	60- 70	359.3	7143	88.7,88.7
80	170.2	163.5	118.3	163.5	170.2	163.5	118.3	163.5	70- 80	219.4	7362	91.4,91.4
90	87.21	65.94	19.83	65.94	87.21	65.94	19.83	65.94	80- 90	118.5	7481	92.9,92.9
100	133.3	97.17	28.37	97.17	133.3	97.17	28.37	97.17	90-100	88.96	7570	94,94
110	145.7	103.7	36.89	103.7	145.7	103.7	36.89	103.7	100-110	103.8	7674	95.3,95.3
120	135.2	97.73	45.60	97.73	135.2	97.73	45.60	97.73	110-120	96.00	7770	96.5,96.5
130	131.0	88.61	53.97	88.61	131.0	88.61	53.97	88.61	120-130	83.25	7853	97.5,97.5
140	122.9	86.86	64.32	86.86	122.9	86.86	64.32	86.86	130-140	69.11	7922	98.3,98.3
150	111.0	86.86	75.51	86.86	111.0	86.86	75.51	86.86	140-150	55.99	7978	99,99
160	98.45	89.74	87.24	89.74	98.45	89.74	87.24	89.74	150-160	41.40	8020	99.6,99.6
170	94.67	95.51	96.95	95.51	94.67	95.51	96.95	95.51	160-170	26.35	8046	99.9,99.9
180	96.66	96.24	99.90	96.24	96.66	96.24	99.90	96.24	170-180	9.208	8055	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

LUMINANCE LIMITATION CURVES

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:8055.1x1 lm		
NAME: LS03-1500-2*20° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

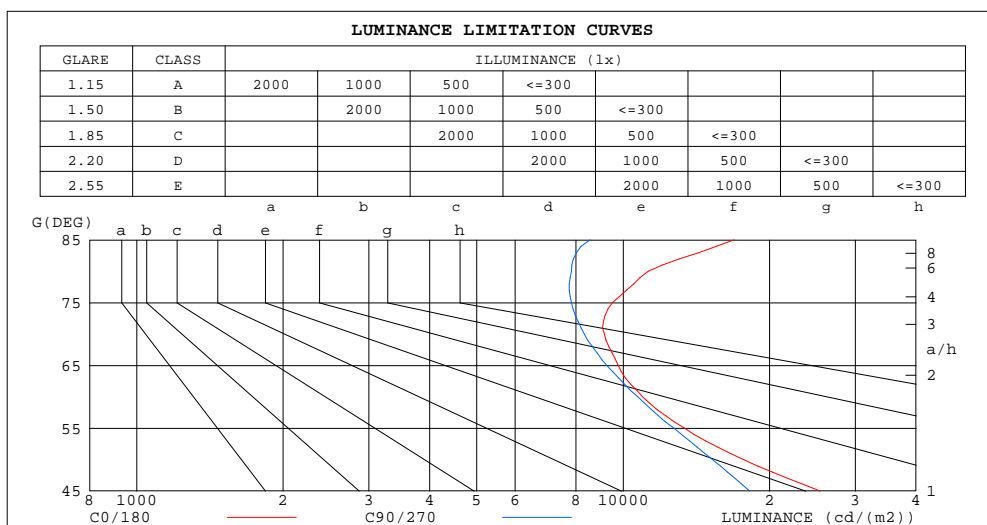

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	16902	8553
80	11267	7828
75	9510	7827
70	9145	8313
65	9775	9249
60	10968	10708
55	13364	12716
50	17664	15250
45	25457	18200


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:8055.1x1 lm		
NAME: LS03-1500-2*20° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.17	1.17	1.17	1.14	1.14	1.14	1.07	1.07	1.07	1.01	1.01	1.01	.95	.95	.95	.93
1.0	1.05	1.02	.99	1.03	.99	.97	.97	.95	.92	.92	.90	.88	.87	.86	.85	.82
2.0	.95	.90	.85	.93	.88	.83	.88	.84	.80	.84	.81	.78	.80	.77	.75	.73
3.0	.86	.79	.74	.84	.78	.73	.80	.75	.71	.77	.72	.69	.73	.70	.67	.65
4.0	.78	.71	.66	.77	.70	.65	.73	.68	.63	.70	.66	.62	.68	.63	.60	.58
5.0	.72	.64	.59	.70	.63	.58	.67	.61	.57	.65	.60	.56	.62	.58	.54	.52
6.0	.66	.58	.53	.64	.57	.52	.62	.56	.51	.60	.54	.50	.58	.53	.49	.48
7.0	.61	.53	.48	.59	.52	.47	.57	.51	.47	.55	.50	.46	.54	.49	.45	.43
8.0	.56	.49	.44	.55	.48	.43	.53	.47	.43	.52	.46	.42	.50	.45	.42	.40
9.0	.52	.45	.40	.51	.44	.40	.50	.44	.39	.48	.43	.39	.47	.42	.38	.37
10.0	.49	.42	.37	.48	.41	.37	.46	.40	.36	.45	.40	.36	.44	.39	.35	.34

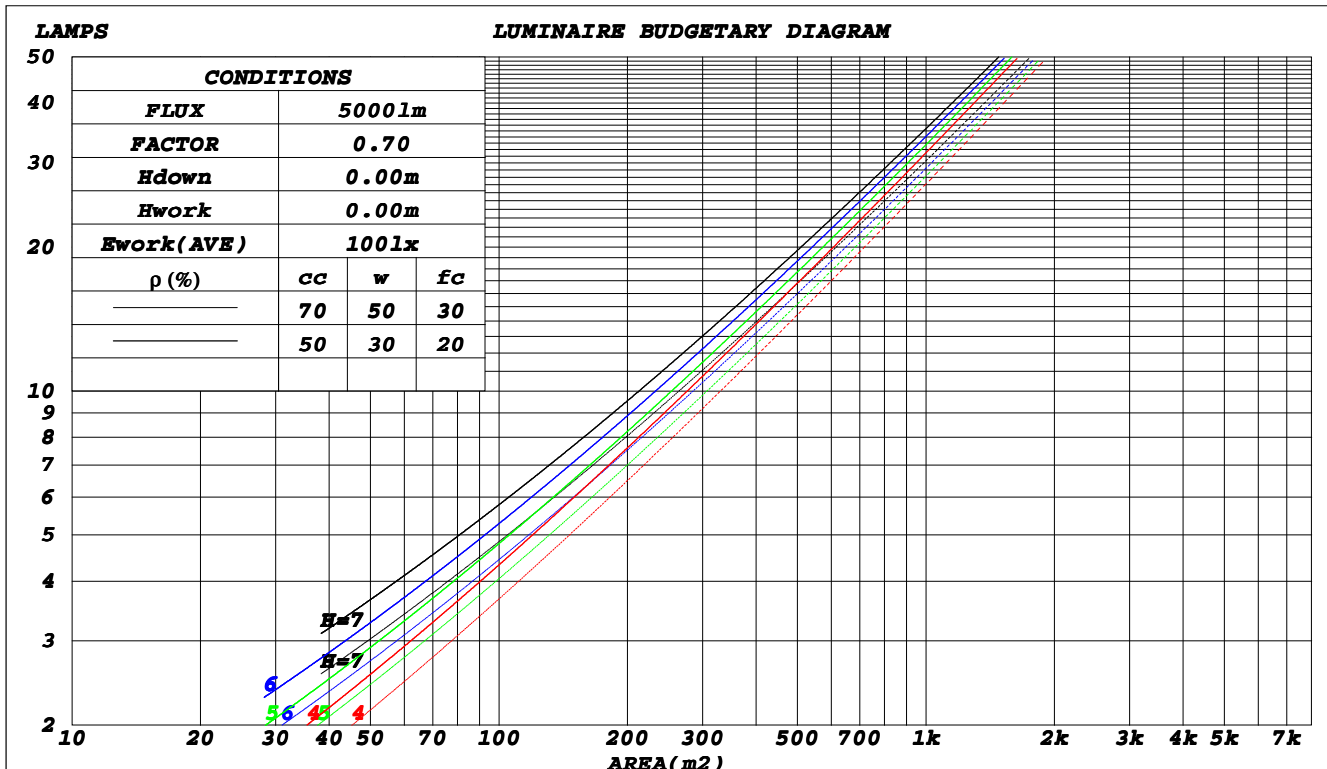

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

WEC AND CCEC

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:8055.1x1 lm		
NAME: LS03-1500-2*20° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.247	.140	.044	.238	.136	.043	.221	.127	.040	.205	.118	.038	.191	.111	.036		
2.0	.231	.127	.039	.223	.123	.038	.209	.116	.036	.195	.109	.034	.182	.103	.032		
3.0	.216	.115	.034	.209	.112	.034	.196	.106	.032	.184	.101	.031	.173	.096	.030		
4.0	.202	.105	.031	.196	.103	.030	.184	.098	.029	.173	.093	.028	.163	.089	.027		
5.0	.190	.097	.028	.184	.095	.028	.174	.090	.027	.164	.086	.026	.155	.083	.025		
6.0	.178	.089	.026	.173	.088	.025	.164	.084	.024	.155	.081	.024	.147	.077	.023		
7.0	.168	.083	.024	.164	.081	.023	.155	.078	.023	.147	.075	.022	.139	.072	.021		
8.0	.159	.078	.022	.155	.076	.022	.147	.073	.021	.139	.071	.020	.133	.068	.020		
9.0	.150	.073	.020	.147	.071	.020	.139	.069	.020	.133	.067	.019	.126	.064	.019		
10.0	.143	.068	.019	.139	.067	.019	.133	.065	.018	.126	.063	.018	.121	.061	.017		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.245	.245	.245	.209	.209	.209	.143	.143	.143	.082	.082	.082	.026	.026	.026	
1.0	.231	.211	.194	.197	.181	.167	.135	.125	.116	.078	.072	.067	.025	.023	.022	
2.0	.219	.187	.160	.188	.161	.139	.129	.112	.097	.074	.065	.057	.024	.021	.018	
3.0	.210	.169	.137	.180	.146	.119	.123	.101	.084	.071	.059	.049	.023	.019	.016	
4.0	.201	.156	.121	.172	.134	.105	.119	.094	.074	.069	.055	.044	.022	.018	.014	
5.0	.193	.145	.109	.166	.125	.095	.114	.088	.067	.066	.051	.040	.021	.017	.013	
6.0	.186	.136	.100	.160	.118	.087	.110	.083	.062	.064	.049	.037	.021	.016	.012	
7.0	.180	.129	.094	.155	.112	.082	.107	.078	.058	.062	.046	.034	.020	.015	.011	
8.0	.174	.123	.088	.150	.107	.077	.104	.075	.055	.060	.044	.033	.020	.015	.011	
9.0	.169	.118	.084	.145	.103	.074	.101	.072	.052	.059	.043	.031	.019	.014	.010	
10.0	.164	.114	.081	.141	.099	.071	.098	.070	.050	.057	.041	.030	.019	.014	.010	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

UGR(Unified Glare Rating) Table

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:8055.1x1 lm												
NAME: LS03-1500-2*20° 60W 000 4000K					TYPE:长条形							
MFR.:					DIM.: W1435*L61*H62.5mm							
					SUR.:W1435*L61mm							
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3		
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3		
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
Room dimensions	Viewed crosswise					Viewed endwise						
x = 2H y = 2H	2H	20.8	22.0	21.2	22.3	22.6	19.5	20.6	19.8	20.9	21.2	
	3H	21.4	22.4	21.7	22.8	23.1	20.2	21.3	20.6	21.6	22.0	
	4H	21.7	22.7	22.1	23.0	23.4	20.5	21.5	20.9	21.9	22.3	
	6H	22.1	23.0	22.5	23.4	23.8	20.8	21.8	21.3	22.2	22.6	
	8H	22.3	23.2	22.8	23.6	24.0	21.0	21.9	21.4	22.3	22.7	
	12H	22.6	23.5	23.1	23.9	24.3	21.1	22.0	21.5	22.4	22.8	
	4H	2H	20.9	21.9	21.3	22.3	22.7	19.7	20.7	20.1	21.1	21.5
		3H	21.7	22.5	22.1	22.9	23.4	20.7	21.6	21.1	22.0	22.4
		4H	22.1	22.9	22.6	23.3	23.8	21.2	22.0	21.7	22.4	22.9
		6H	22.7	23.4	23.2	23.9	24.4	21.7	22.4	22.2	22.8	23.3
		8H	23.1	23.8	23.6	24.2	24.8	21.9	22.5	22.4	23.0	23.5
		12H	23.5	24.1	24.1	24.6	25.2	22.1	22.7	22.6	23.2	23.7
8H	4H	22.3	22.9	22.8	23.4	23.9	21.4	22.1	21.9	22.5	23.1	
	6H	23.1	23.6	23.6	24.2	24.7	22.1	22.6	22.7	23.2	23.7	
	8H	23.6	24.1	24.2	24.7	25.2	22.5	22.9	23.0	23.5	24.1	
	12H	24.3	24.7	24.8	25.2	25.9	22.8	23.2	23.4	23.8	24.4	
12H	4H	22.3	22.9	22.8	23.4	23.9	21.5	22.1	22.0	22.6	23.1	
	6H	23.2	23.6	23.7	24.2	24.8	22.2	22.7	22.8	23.3	23.8	
	8H	23.8	24.2	24.4	24.8	25.4	22.7	23.1	23.3	23.7	24.3	
Variations with the observer position at spacings:												
S = 1.0H	+ 0.8 / - 0.8					+ 0.4 / - 0.5						
1.5H	+ 1.5 / - 0.6					+ 0.2 / - 0.3						
2.0H	+ 1.3 / - 0.5					+ 0.7 / - 0.6						

CIE Pub.117, 8055 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 7.2$)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

UTILIZATION FACTORS TABLE

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:8055.1x1 lm		
NAME: LS03-1500-2*20° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	69	60	55	68	60	54	67	59	54	49
0.80	78	69	63	77	69	63	75	68	63	57
1.00	85	76	71	83	75	70	81	76	69	63
1.25	91	82	77	89	81	76	86	80	75	69
1.50	94	87	81	93	86	81	89	83	79	72
2.00	99	93	88	97	91	87	93	88	84	77
2.50	102	96	91	100	94	90	95	91	87	79
3.00	105	99	95	102	97	93	97	93	90	81
4.00	108	103	99	105	101	98	100	97	94	84
5.00	109	106	102	107	103	100	101	99	96	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

ISOCANDELA DIAGRAM

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:8055.1x1 lm		
NAME: LS03-1500-2*20° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

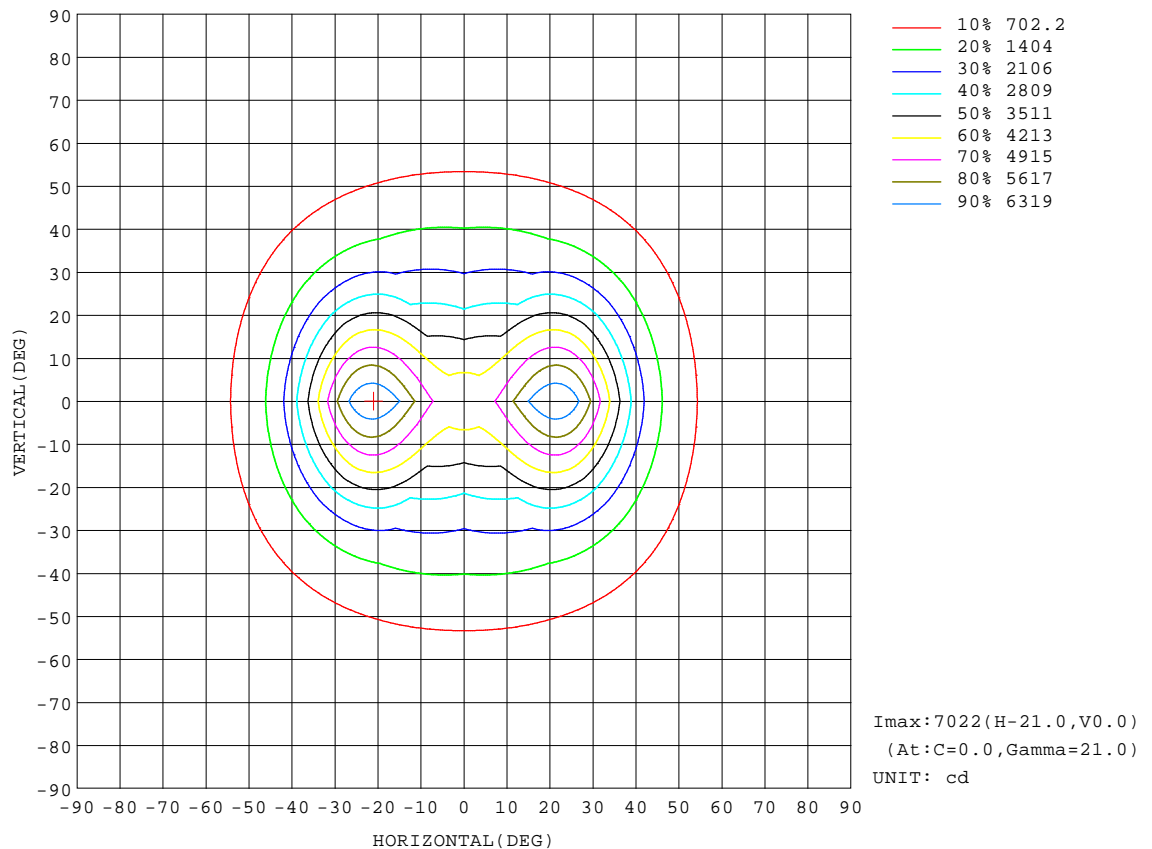


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

AAI Figure

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:8055.1x1 lm		
NAME: LS03-1500-2*20° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

Flux out:4090 lm

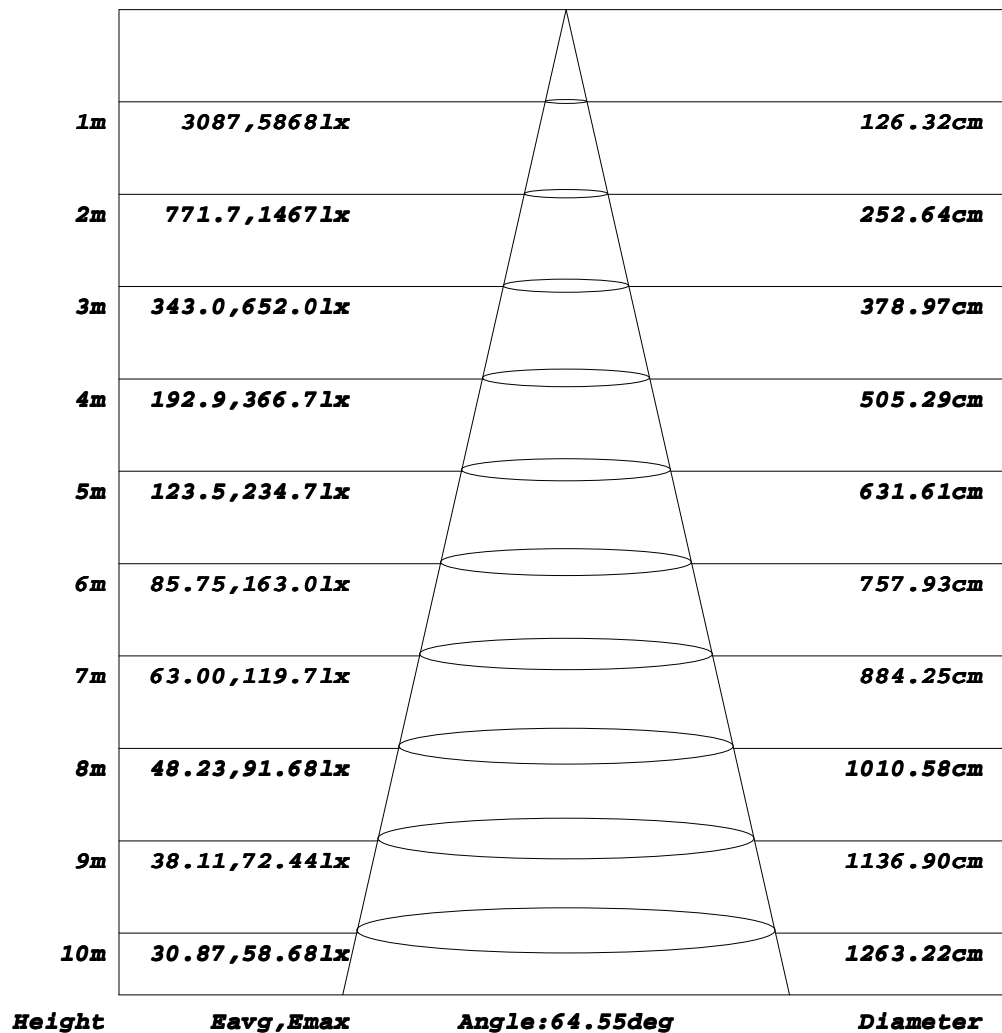


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

ISOLUX DIAGRAM


Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:8055.1x1 lm		
NAME: LS03-1500-2*20° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

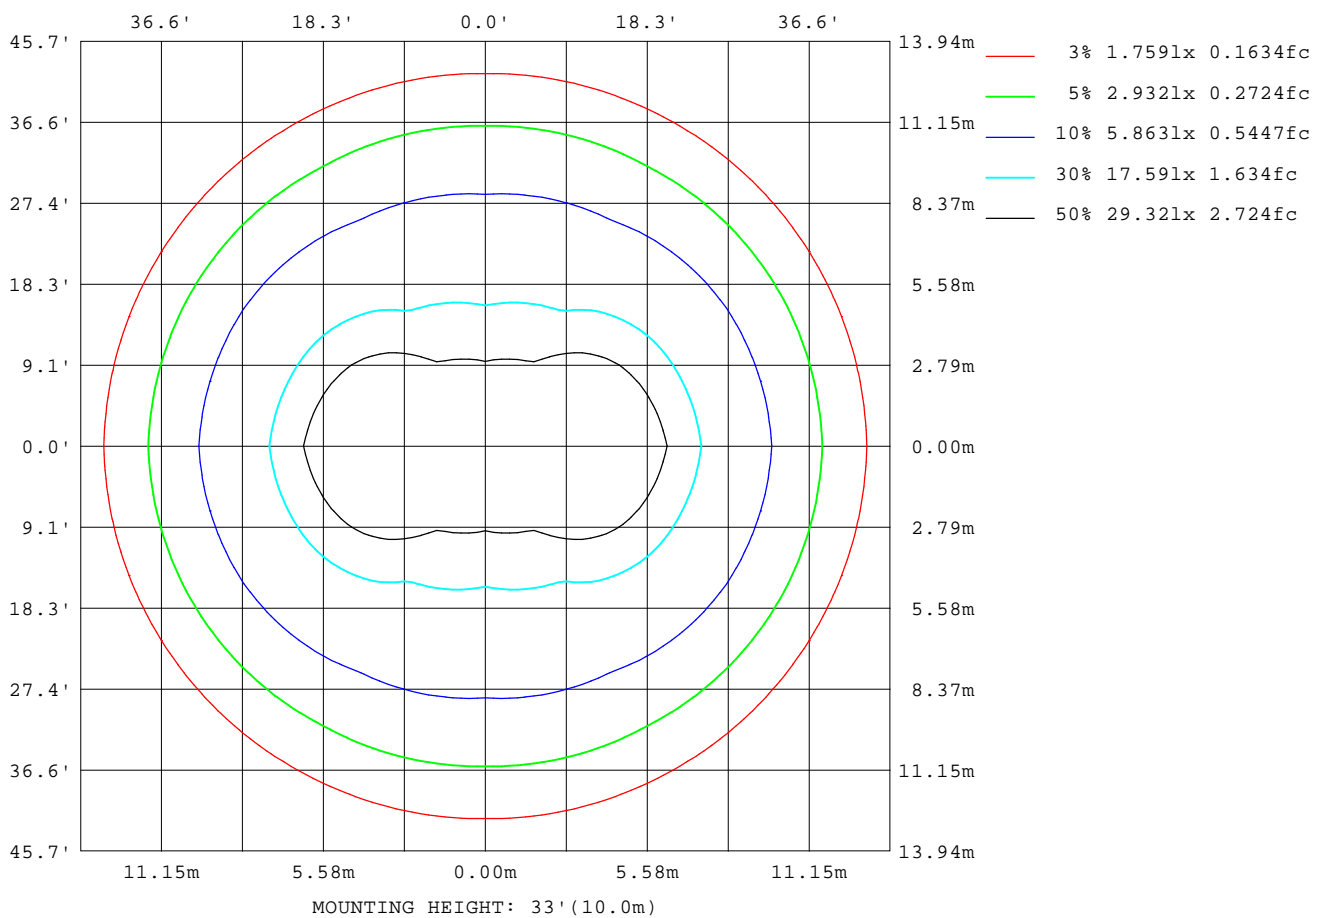

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

Planar Illuminance Curve

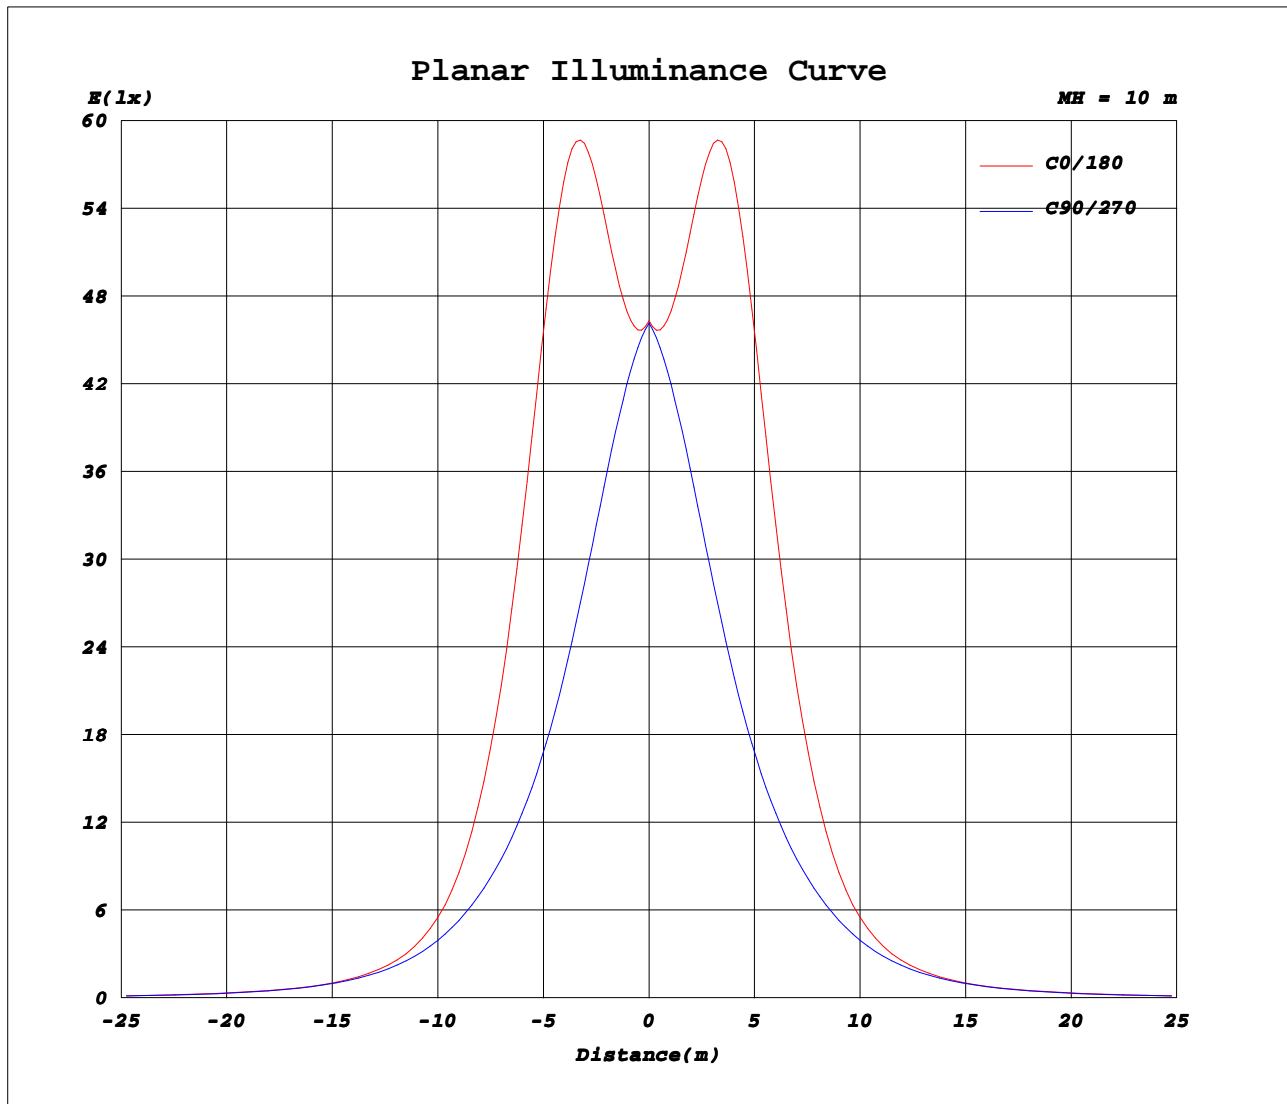

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:8055.1x1 lm		
NAME: LS03-1500-2*20° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

Table--1

UNIT: cd

C(°) \ γ (°)	0	30	60	90	120	150	180	210	240	270	300	330							
0	4631	4629	4611	4616	4611	4629	4631	4629	4611	4616	4611	4629							
5	4690	4502	4320	4339	4320	4502	4690	4502	4320	4339	4320	4502							
10	5341	4665	4020	3930	4020	4665	5341	4665	4020	3930	4020	4665							
15	6327	4937	3682	3437	3682	4937	6327	4937	3682	3437	3682	4937							
20	7001	5079	3295	2939	3295	5079	7001	5079	3295	2939	3295	5079							
25	6680	4818	2855	2477	2855	4818	6680	4818	2855	2477	2855	4818							
30	5440	4073	2390	2080	2390	4073	5440	4073	2390	2080	2390	4073							
35	3885	3066	1948	1729	1948	3066	3885	3066	1948	1729	1948	3066							
40	2528	2111	1540	1415	1540	2111	2528	2111	1540	1415	1540	2111							
45	1566	1394	1176	1120	1176	1394	1566	1394	1176	1120	1176	1394							
50	988	930	872	853	872	930	988	930	872	853	872	930							
55	667	654	646	635	646	654	667	654	646	635	646	654							
60	477	478	482	466	482	478	477	478	482	466	482	478							
65	359	361	364	340	364	361	359	361	364	340	364	361							
70	272	277	273	247	273	277	272	277	273	247	273	277							
75	214	216	202	176	202	216	214	216	202	176	202	216							
80	170	176	151	118	151	176	170	176	151	118	151	176							
85	128	130	104	64.8	104	130	128	130	104	64.8	104	130							
90	87.2	77.6	54.3	19.8	54.3	77.6	87.2	77.6	54.3	19.8	54.3	77.6							
95	131	114	74.1	24.6	74.1	114	131	114	74.1	24.6	74.1	114							
100	133	116	78.4	28.4	78.4	116	133	116	78.4	28.4	78.4	116							
105	145	127	83.9	32.4	83.9	127	145	127	83.9	32.4	83.9	127							
110	146	127	80.4	36.9	80.4	127	146	127	80.4	36.9	80.4	127							
115	139	122	75.5	44.6	75.5	122	139	122	75.5	44.6	75.5	122							
120	135	121	74.8	45.6	74.8	121	135	121	74.8	45.6	74.8	121							
125	134	113	74.0	49.2	74.0	113	134	113	74.0	49.2	74.0	113							
130	131	104	73.5	54.0	73.5	104	131	104	73.5	54.0	73.5	104							
135	127	99.9	73.8	59.0	73.8	99.9	127	99.9	73.8	59.0	73.8	99.9							
140	123	98.8	74.9	64.3	74.9	98.8	123	98.8	74.9	64.3	74.9	98.8							
145	118	97.0	77.3	69.8	77.3	97.0	118	97.0	77.3	69.8	77.3	97.0							
150	111	93.2	80.5	75.5	80.5	93.2	111	93.2	80.5	75.5	80.5	93.2							
155	104	90.0	84.7	81.5	84.7	90.0	104	90.0	84.7	81.5	84.7	90.0							
160	98.4	90.5	89.0	87.2	89.0	90.5	98.4	90.5	89.0	87.2	89.0	90.5							
165	95.3	93.1	92.8	92.6	92.8	93.1	95.3	93.1	92.8	92.6	92.8	93.1							
170	94.7	95.2	95.9	96.9	95.9	95.2	94.7	95.2	95.9	96.9	95.9	95.2							
175	95.7	95.8	97.6	99.5	97.6	95.8	95.7	95.8	97.6	99.5	97.6	95.8							
180	96.7	94.9	97.5	99.9	97.5	94.9	96.7	94.9	97.5	99.9	97.5	94.9							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0