


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:7984.13x1 lm		
NAME: LS03-1500-30° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 129.40 lm/W			
MODEL		Imax(cd)	15719	S/MH(C0/180)	0.44
NOMINAL POWER(W)	61.7	LOR(%)	100.0	S/MH(C90/270)	0.54
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	7984.1	η UP,DN(C0-180)	2.7,48.0
NOMINAL FLUX(lm)	7984.13	CIE CLASS	DIRECT	η UP,DN(C180-360)	2.8,46.5
LAMPS INSIDE	1	η up(%)	5.5	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	221.7	η down(%)	94.5	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

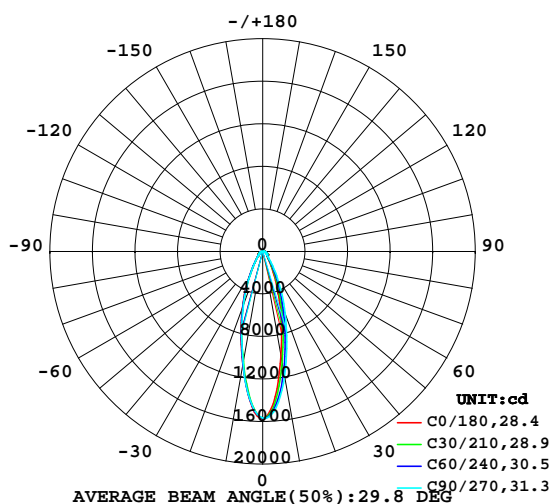

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

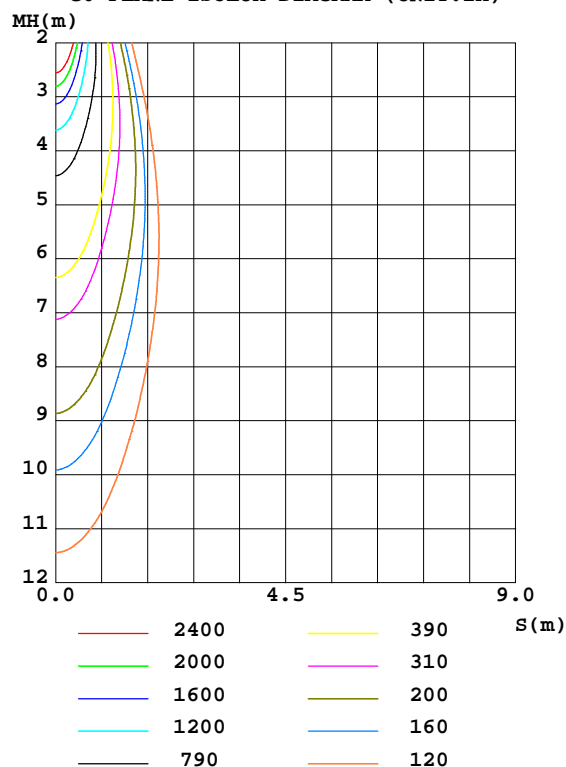

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	997.6	1102	1192	1116	1076	1062	1065	1040	0- 10	1237	1237	15.5,15.5
20	446.9	527.7	619.8	588.9	562.1	546.3	530.5	488.4	10- 20	2154	3392	42.5,42.5
30	165.0	206.0	265.2	240.1	221.3	221.6	215.1	189.0	20- 30	1613	5005	62.7,62.7
40	75.32	86.19	102.7	94.82	89.83	90.45	87.92	82.26	30- 40	858.6	5863	73.4,73.4
50	58.56	57.30	54.73	56.04	56.77	56.39	52.34	57.53	40- 50	528.5	6392	80.1,80.1
60	55.04	45.16	36.96	43.42	51.25	43.91	37.01	44.98	50- 60	454.0	6846	85.7,85.7
70	26.98	26.64	23.76	25.92	28.40	27.03	24.78	27.54	60- 70	344.9	7191	90.1,90.1
80	18.31	17.03	12.59	16.09	18.66	17.41	13.37	18.14	70- 80	228.1	7419	92.9,92.9
90	8.515	6.985	0.9281	6.977	9.633	7.969	1.872	7.915	80- 90	124.3	7543	94.5,94.5
100	9.042	6.948	1.341	7.016	10.15	7.899	2.151	7.754	90-100	74.32	7618	95.4,95.4
110	8.990	6.652	1.987	6.838	9.872	7.541	2.610	7.251	100-110	71.63	7689	96.3,96.3
120	8.705	6.434	2.821	6.767	9.203	7.196	3.289	6.770	110-120	65.21	7754	97.1,97.1
130	8.699	6.244	3.863	6.994	8.628	7.221	4.184	6.270	120-130	58.42	7813	97.9,97.9
140	8.958	6.857	5.079	7.495	8.615	7.622	5.234	6.749	130-140	52.67	7866	98.5,98.5
150	9.300	7.617	6.342	8.169	9.006	8.325	6.419	7.423	140-150	46.87	7912	99.1,99.1
160	9.576	8.160	7.667	8.883	9.301	9.034	7.794	8.014	150-160	37.87	7950	99.6,99.6
170	9.438	8.767	9.002	9.391	9.113	9.422	9.129	8.769	160-170	24.98	7975	99.9,99.9
180	9.201	9.447	9.765	9.598	9.212	9.450	9.749	9.597	170-180	8.841	7984	100,100
DEG	LUMINOUS INTENSITY: $\times 10\text{cd}$									UNIT: lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

LUMINANCE LIMITATION CURVES

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:7984.13x1 lm		
NAME: LS03-1500-30° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

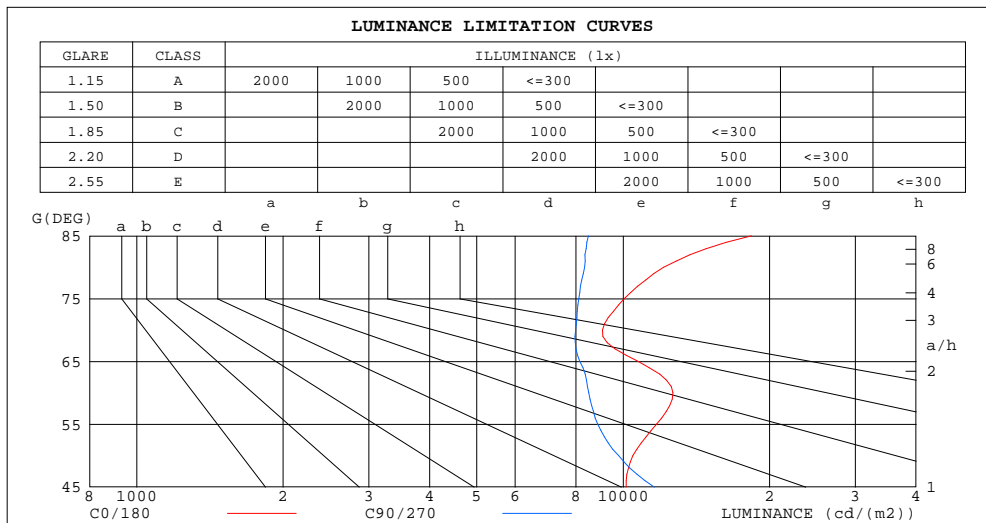

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	18349	8481
80	12118	8334
75	10048	8104
70	9069	7984
65	10733	8149
60	12654	8496
55	11712	8868
50	10471	9786
45	10148	11584


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:7984.13x1 lm		
NAME: LS03-1500-30° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.18	1.18	1.18	1.14	1.14	1.14	1.08	1.08	1.08	1.02	1.02	1.02	.97	.97	.97	.94
1.0	1.07	1.04	1.01	1.04	1.02	.99	.99	.97	.95	.95	.93	.91	.90	.89	.88	.85
2.0	.98	.93	.89	.96	.91	.88	.92	.88	.85	.88	.85	.82	.84	.82	.80	.78
3.0	.91	.85	.80	.89	.83	.79	.85	.81	.77	.82	.78	.75	.79	.76	.73	.71
4.0	.84	.78	.73	.83	.77	.72	.80	.75	.71	.77	.73	.70	.74	.71	.68	.66
5.0	.79	.72	.67	.77	.71	.67	.75	.70	.66	.73	.68	.65	.70	.67	.64	.62
6.0	.74	.67	.63	.73	.67	.62	.71	.65	.61	.69	.64	.61	.67	.63	.60	.58
7.0	.70	.63	.59	.69	.63	.58	.67	.62	.58	.65	.60	.57	.64	.59	.56	.55
8.0	.66	.60	.55	.65	.59	.55	.63	.58	.54	.62	.57	.54	.61	.56	.53	.52
9.0	.63	.56	.52	.62	.56	.52	.60	.55	.52	.59	.55	.51	.58	.54	.51	.49
10.0	.60	.54	.50	.59	.53	.49	.58	.53	.49	.57	.52	.49	.56	.51	.48	.47

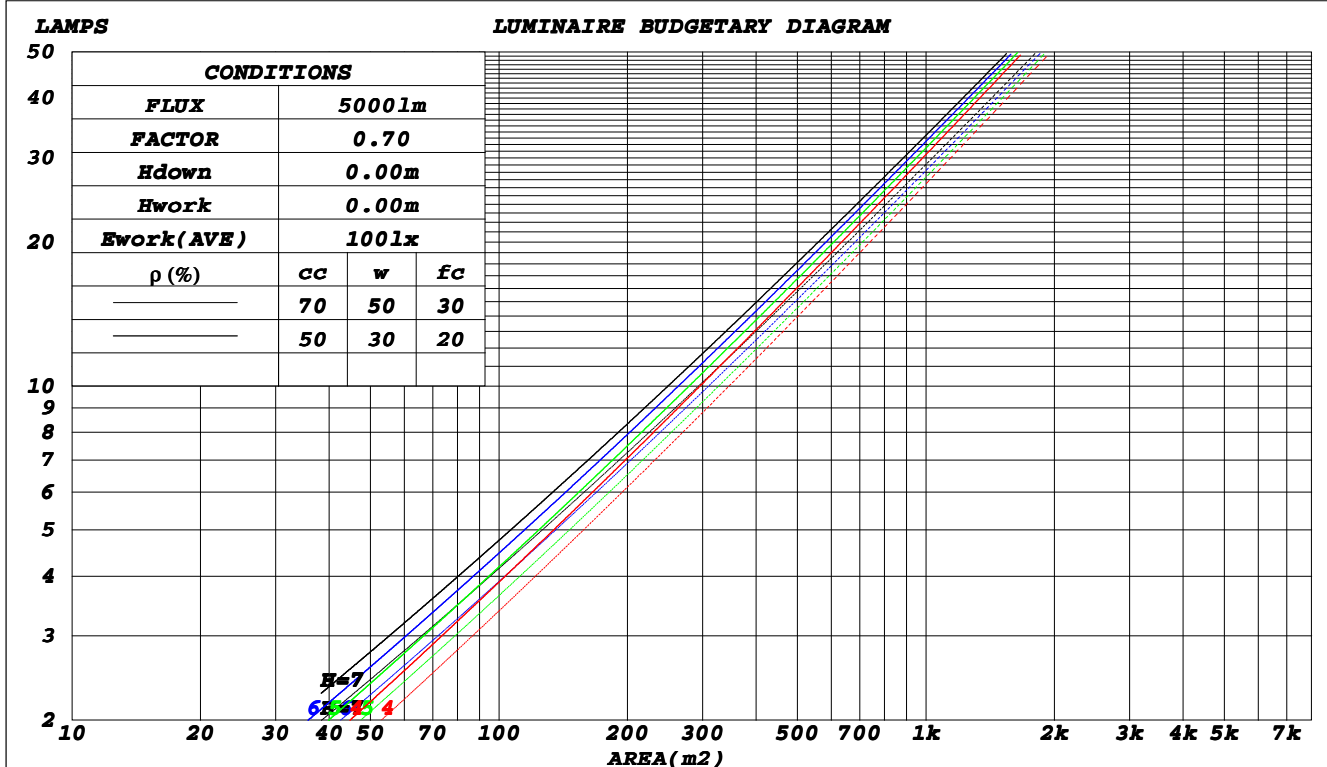

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

WEC AND CCEC

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:7984.13x1 lm		
NAME: LS03-1500-30° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.223	.127	.040	.215	.122	.039	.199	.114	.036	.184	.106	.034	.170	.099	.032		
2.0	.205	.112	.035	.198	.109	.034	.184	.102	.032	.171	.096	.030	.160	.090	.028		
3.0	.190	.101	.030	.183	.098	.030	.171	.093	.028	.160	.088	.027	.149	.083	.026		
4.0	.176	.091	.027	.170	.089	.026	.160	.085	.025	.150	.080	.024	.140	.076	.023		
5.0	.164	.083	.024	.159	.082	.024	.149	.078	.023	.141	.074	.022	.132	.071	.021		
6.0	.153	.077	.022	.149	.075	.022	.140	.072	.021	.133	.069	.020	.125	.066	.020		
7.0	.144	.071	.020	.140	.070	.020	.133	.067	.019	.125	.064	.019	.119	.062	.018		
8.0	.136	.066	.019	.132	.065	.018	.126	.063	.018	.119	.060	.017	.113	.058	.017		
9.0	.129	.062	.017	.125	.061	.017	.119	.059	.017	.113	.057	.016	.108	.055	.016		
10.0	.122	.059	.016	.119	.058	.016	.113	.056	.016	.108	.054	.015	.103	.052	.015		

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.233	.233	.233	.199	.199	.199	.136	.136	.136	.078	.078	.078	.025	.025	.025		
1.0	.217	.199	.184	.185	.171	.158	.127	.118	.109	.073	.068	.064	.023	.022	.021		
2.0	.203	.175	.151	.174	.151	.131	.119	.104	.091	.069	.061	.053	.022	.020	.017		
3.0	.192	.157	.129	.165	.135	.111	.113	.094	.078	.065	.055	.046	.021	.018	.015		
4.0	.182	.142	.112	.156	.123	.098	.107	.086	.069	.062	.050	.041	.020	.016	.013		
5.0	.173	.131	.100	.149	.114	.087	.102	.079	.062	.059	.047	.037	.019	.015	.012		
6.0	.165	.122	.091	.142	.106	.079	.098	.074	.056	.057	.044	.033	.018	.014	.011		
7.0	.158	.115	.084	.136	.099	.073	.094	.070	.052	.055	.041	.031	.018	.013	.010		
8.0	.152	.109	.079	.131	.094	.069	.091	.066	.049	.053	.039	.029	.017	.013	.010		
9.0	.146	.103	.074	.126	.090	.065	.087	.063	.046	.051	.037	.027	.016	.012	.009		
10.0	.141	.099	.071	.122	.086	.062	.085	.060	.044	.049	.036	.026	.016	.012	.009		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

UGR(Unified Glare Rating) Table

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:7984.13x1 lm										
NAME: LS03-1500-30° 60W 000 4000K					TYPE:长条形					
MFR.:					DIM.: W1435*L61*H62.5mm					
					SUR.:W1435*L61mm					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.2	19.2	18.5	19.4	19.7	17.4	18.4	17.7	18.6	18.9
3H	19.4	20.4	19.8	20.7	21.0	18.6	19.5	19.0	19.8	20.2
4H	20.1	21.0	20.5	21.3	21.7	19.3	20.1	19.6	20.5	20.8
6H	20.9	21.7	21.3	22.1	22.4	19.8	20.7	20.2	21.0	21.4
8H	21.3	22.1	21.7	22.5	22.8	20.1	20.9	20.5	21.2	21.6
12H	21.8	22.6	22.2	22.9	23.3	20.2	21.0	20.6	21.4	21.8
4H 2H	18.6	19.5	19.0	19.8	20.1	18.0	18.9	18.4	19.2	19.5
3H	20.1	20.9	20.5	21.2	21.6	19.5	20.2	19.9	20.6	21.0
4H	21.0	21.7	21.4	22.1	22.5	20.3	21.0	20.7	21.4	21.8
6H	21.9	22.6	22.4	23.0	23.5	21.0	21.7	21.5	22.1	22.6
8H	22.5	23.1	23.0	23.5	24.0	21.3	21.9	21.8	22.4	22.9
12H	23.1	23.6	23.6	24.1	24.6	21.6	22.1	22.1	22.6	23.1
8H 4H	21.3	21.9	21.8	22.3	22.8	20.7	21.3	21.2	21.7	22.2
6H	22.5	23.0	23.0	23.5	24.0	21.7	22.2	22.2	22.7	23.2
8H	23.2	23.6	23.7	24.1	24.7	22.1	22.6	22.7	23.1	23.6
12H	24.0	24.3	24.5	24.9	25.5	22.5	22.9	23.1	23.4	24.0
12H 4H	21.3	21.8	21.8	22.3	22.8	20.8	21.3	21.3	21.8	22.3
6H	22.6	23.0	23.1	23.6	24.1	21.9	22.3	22.4	22.8	23.4
8H	23.4	23.8	23.9	24.3	24.9	22.4	22.8	23.0	23.3	23.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.3				
1.5H	+ 0.3 / - 0.2					+ 0.2 / - 0.2				
2.0H	+ 0.3 / - 0.6					+ 0.2 / - 0.3				

CIE Pub.117, 7984 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 7.2$)

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

UTILIZATION FACTORS TABLE

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:7984.13x1 lm		
NAME: LS03-1500-30° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	75	67	62	74	67	62	73	66	62	57
0.80	83	75	70	82	75	70	81	74	69	64
1.00	89	81	76	88	80	76	85	80	75	69
1.25	94	86	82	92	86	81	90	84	80	74
1.50	97	90	86	96	89	85	92	87	83	77
2.00	101	95	91	99	94	90	96	91	88	80
2.50	104	98	94	102	97	93	98	94	90	82
3.00	106	101	97	104	99	96	99	96	93	84
4.00	109	105	102	106	103	100	102	99	96	87
5.00	111	107	104	108	105	102	103	101	99	89
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

ISOCANDELA DIAGRAM

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:7984.13x1 lm		
NAME: LS03-1500-30° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

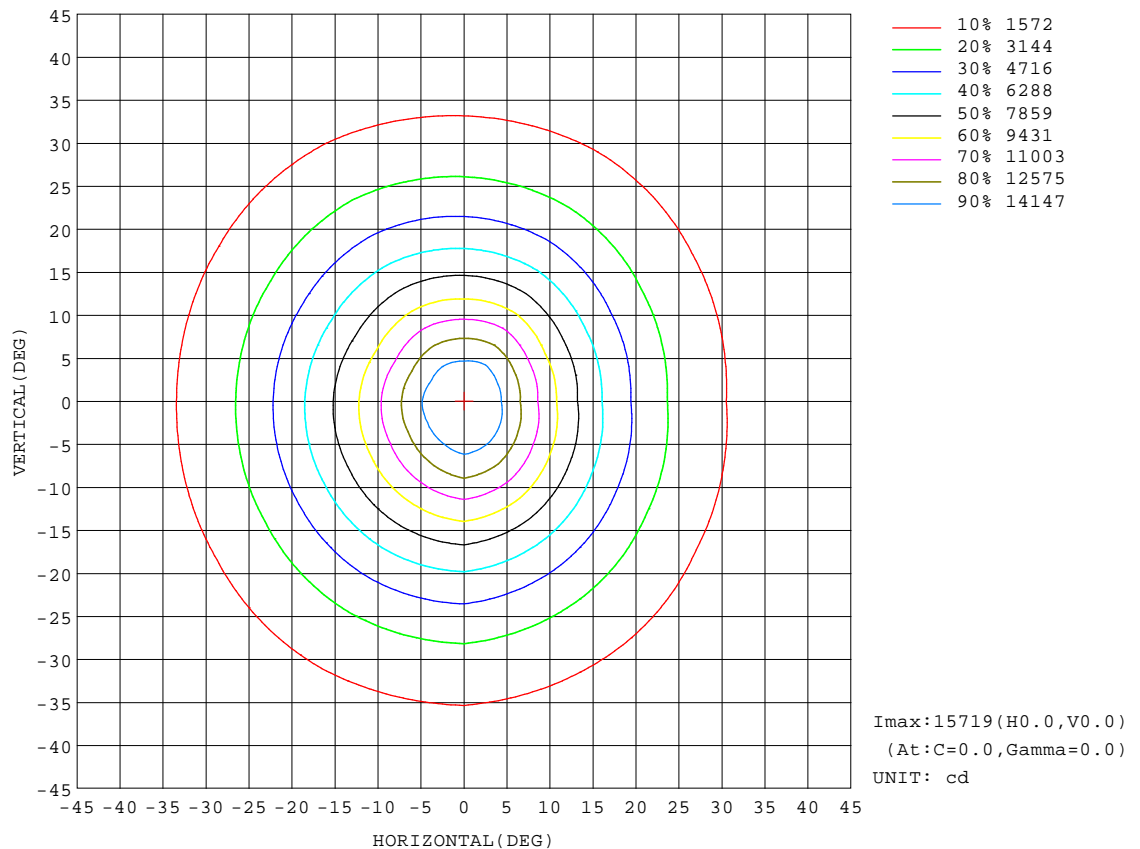


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

AAI Figure

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:7984.13x1 lm		
NAME: LS03-1500-30° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

Flux out:2323 lm

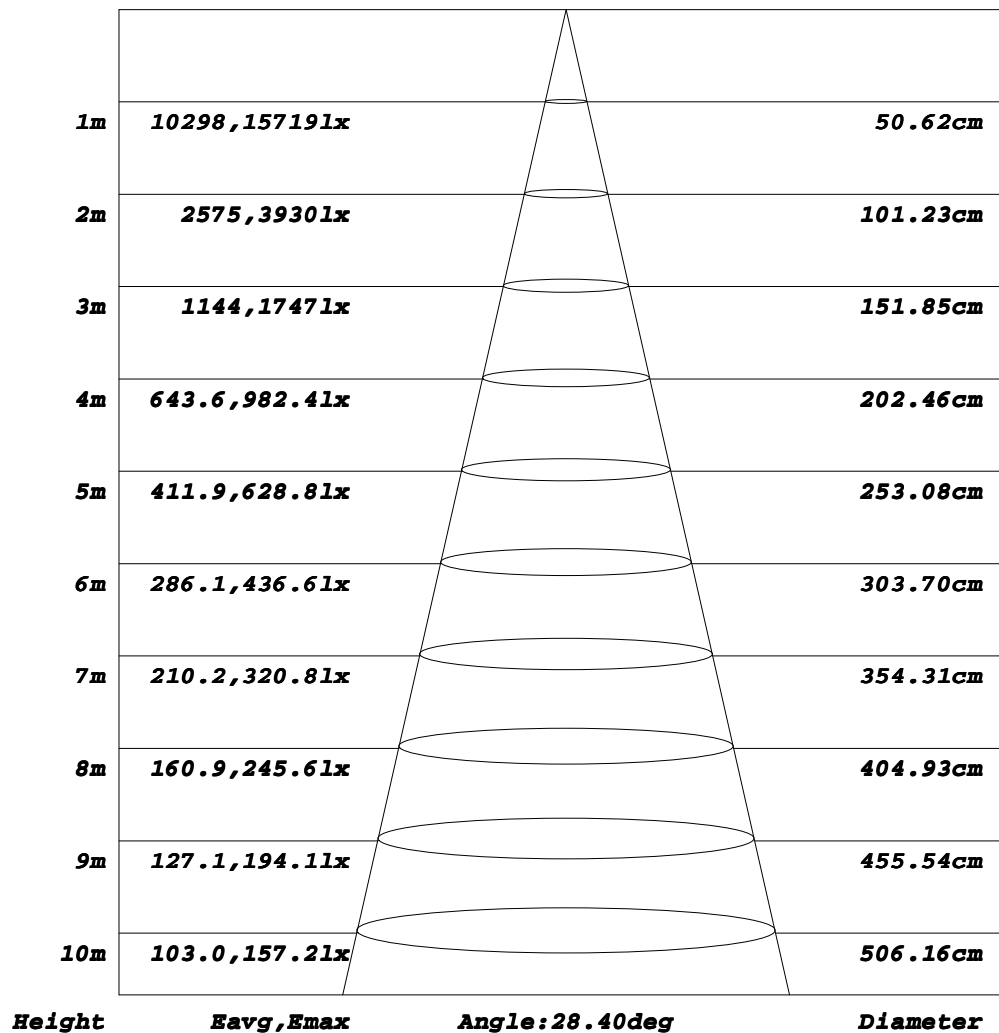


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

ISOLUX DIAGRAM


Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:7984.13x1 lm		
NAME: LS03-1500-30° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

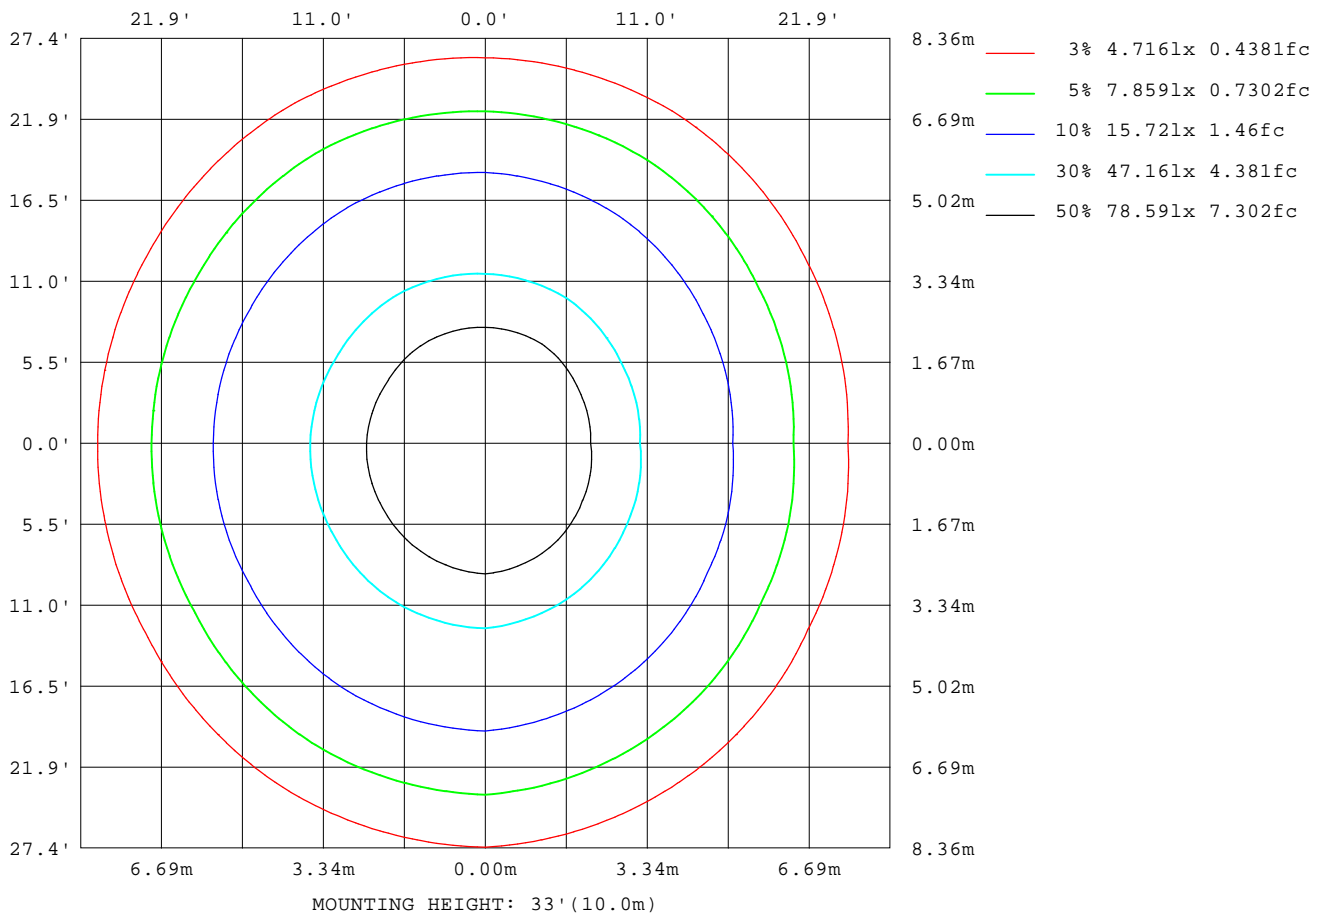

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

Planar Illuminance Curve

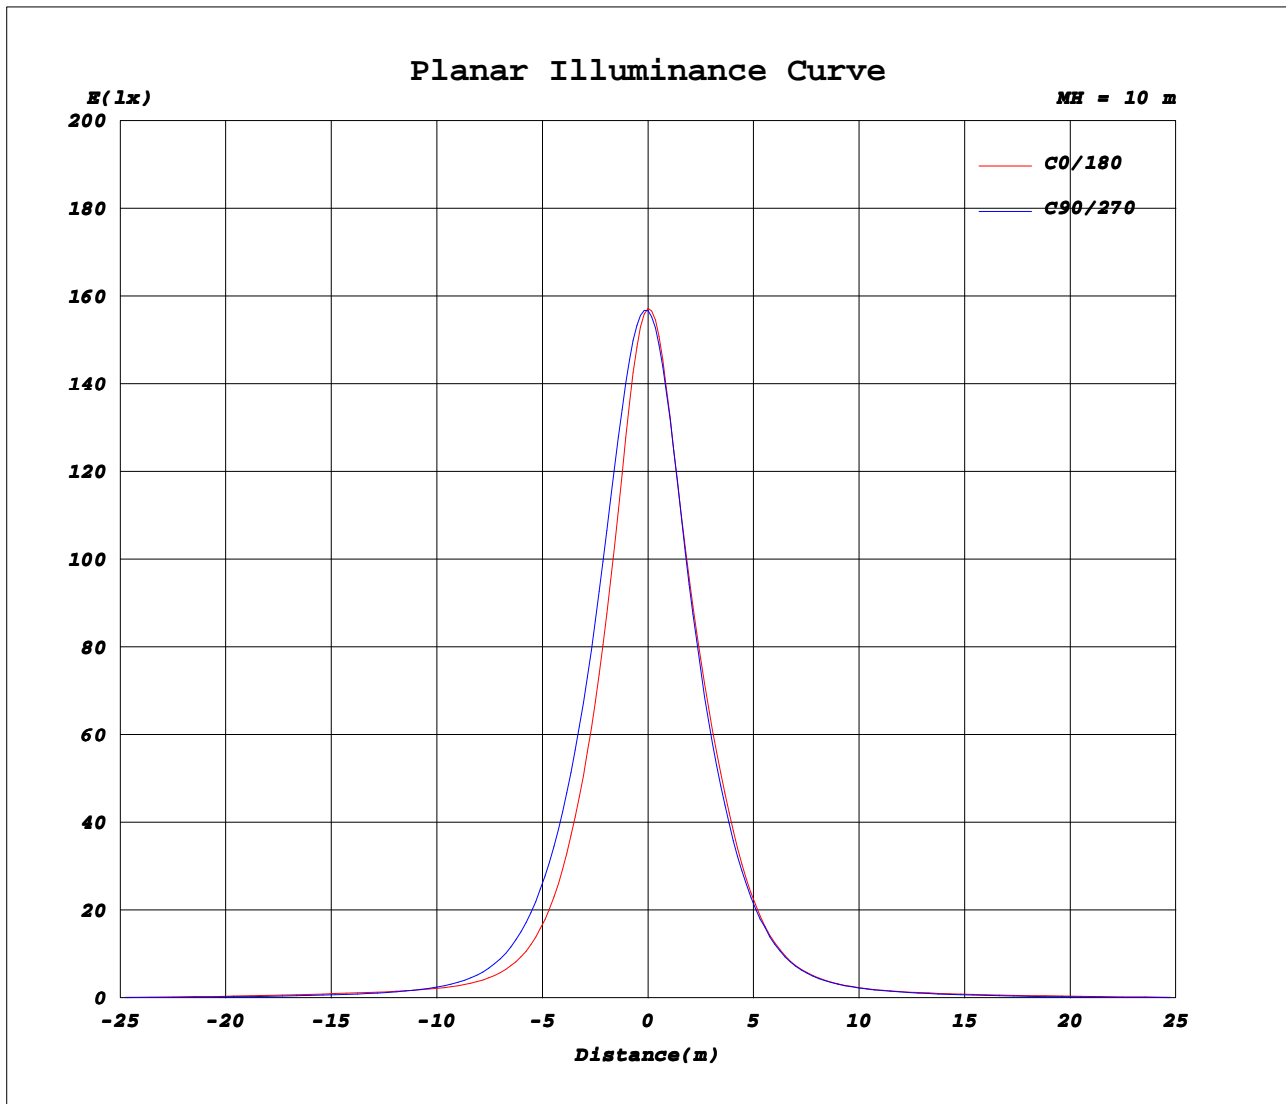

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-07

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.70V I:0.2860A P:61.700W PF:0.9770 Freq:50.00Hz Lamp Flux:7984.13x1 lm		
NAME: LS03-1500-30° 60W 000 4000K	TYPE:长条形	
MFR.:	DIM.: W1435*L61*H62.5mm	
	SUR.:W1435*L61mm	

Table--1

UNIT: ×10cd

C(°)	0	30	60	90	120	150	180	210	240	270	300	330						
γ (°)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85
0	1572	1568	1568	1567	1567	1567	1572	1568	1568	1567	1567	1567						
5	1372	1411	1449	1472	1435	1410	1406	1385	1401	1397	1410	1381						
10	998	1059	1144	1192	1140	1092	1076	1049	1076	1065	1072	1008						
15	683	739	820	881	845	810	797	770	779	763	752	698						
20	447	493	562	620	604	574	562	545	548	531	511	466						
25	274	306	364	417	404	374	364	355	362	348	327	291						
30	165	186	226	265	252	228	221	219	224	215	201	177						
35	106	116	139	163	154	139	135	134	138	132	125	112						
40	75.3	80.7	91.7	103	98.7	90.9	89.8	89.3	91.6	87.9	85.4	79.1						
45	62.4	64.3	68.2	71.3	70.4	67.1	67.5	67.1	68.6	65.2	66.0	63.5						
50	58.6	57.7	56.9	54.7	56.4	55.7	56.8	56.3	56.5	52.3	56.7	58.3						
55	58.4	55.7	49.9	44.3	48.3	50.8	52.5	51.1	48.3	44.2	50.4	55.8						
60	55.0	49.9	40.4	37.0	39.4	47.5	51.3	47.1	40.7	37.0	41.1	48.9						
65	39.5	35.5	31.6	30.0	30.9	35.3	43.6	36.6	32.1	31.1	32.4	35.1						
70	27.0	26.8	26.5	23.8	25.6	26.2	28.4	27.0	27.0	24.8	27.7	27.4						
75	22.6	22.4	21.4	18.2	20.4	21.6	23.0	22.6	22.0	19.1	22.8	23.1						
80	18.3	18.0	16.1	12.6	15.0	17.2	18.7	18.2	16.7	13.4	17.5	18.8						
85	13.9	13.1	10.4	6.43	9.24	12.3	14.2	13.4	10.8	7.16	11.7	14.0						
90	8.51	8.59	5.38	0.93	5.13	8.82	9.63	9.83	6.11	1.87	6.34	9.49						
95	9.01	8.65	5.43	1.10	5.27	8.95	10.1	9.91	6.22	1.98	6.21	9.54						
100	9.04	8.49	5.41	1.34	5.29	8.74	10.1	9.62	6.18	2.15	6.18	9.33						
105	9.05	8.39	5.35	1.64	5.29	8.60	10.1	9.41	6.09	2.36	6.02	9.11						
110	8.99	8.23	5.07	1.99	5.30	8.38	9.87	9.10	5.99	2.61	5.67	8.84						
115	8.88	8.02	4.89	2.39	5.35	8.18	9.56	8.73	5.93	2.92	5.32	8.51						
120	8.71	7.88	4.98	2.82	5.50	8.03	9.20	8.41	5.98	3.29	5.30	8.24						
125	8.66	7.44	5.15	3.32	5.71	7.98	8.89	8.20	6.12	3.71	5.31	7.49						
130	8.70	7.06	5.42	3.86	5.99	7.99	8.63	8.13	6.32	4.18	5.45	7.09						
135	8.79	7.16	5.78	4.45	6.31	8.10	8.51	8.17	6.57	4.70	5.77	7.14						
140	8.96	7.53	6.19	5.08	6.70	8.29	8.61	8.32	6.92	5.23	6.13	7.37						
145	9.10	7.94	6.62	5.70	7.10	8.52	8.78	8.58	7.32	5.81	6.53	7.69						
150	9.30	8.23	7.01	6.34	7.55	8.79	9.01	8.88	7.77	6.42	6.88	7.96						
155	9.48	8.45	7.35	6.99	8.00	9.08	9.23	9.19	8.20	7.08	7.26	8.19						
160	9.58	8.58	7.74	7.67	8.43	9.34	9.30	9.42	8.64	7.79	7.71	8.32						
165	9.54	8.66	8.22	8.36	8.87	9.45	9.32	9.49	9.05	8.51	8.27	8.46						
170	9.44	8.76	8.77	9.00	9.28	9.50	9.11	9.47	9.37	9.13	8.89	8.65						
175	9.28	8.93	9.26	9.49	9.62	9.48	9.03	9.35	9.60	9.56	9.44	8.98						
180	9.20	9.26	9.63	9.76	9.77	9.43	9.21	9.26	9.64	9.75	9.77	9.43						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-07

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: 使用 BK-BHL070-2000AM, LS03-11S3P-V1.0