


ANTI-LIGATURE LIGHT




ULTRA U400




White



Dimensions

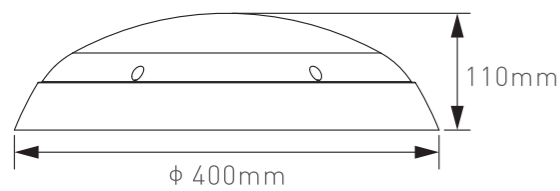

Photometrics

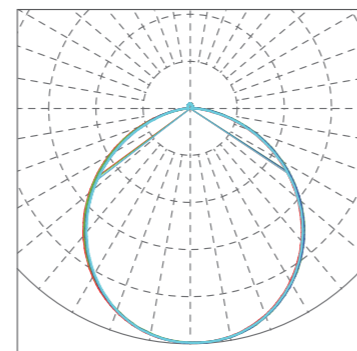

— C0/180,110.1 — C60/240,109.5
— C30/210,110.5 — C90/270,108.9

ANTI-LIGATURE LIGHT

Features & Benefits

Ultra is a robust Anti-ligature light, ideally suited to environments where consideration of the actions of individuals need priority such as hospitals, prisons, mental health care centers.

Function



Lumen Output

Model	Power	3000K	4000K	5000K		Colour Temp.	Lumen Efficiency
U400	36W	4444lm	4541m	4638m	(±10%)	3000K	129 lm/W
<ul style="list-style-type: none"> • Customized higher lumen output available 							
						4000K	132 lm/W
						5000K	135 lm/W

Specification

Input Voltage	CRI	Power Factor	SDCM	Beam Angle	Operation Temp.	IP/IK	Fitting Material	Class
220~240VAC	>80	>0.9	3	120°	-20 °C~+40 °C	IP66/IK20	Cast Aluminum	II

Standard Lifespan	Premium Lifespan	Standard	Emergency Lumen	Battery
L70B50: 50,000h	L70B50: 125,000h / L80B10: 65,000h	EN60598-2-1/EN55015/EN62778/EN60598-2-22	200lm~400lm	3h Durat