

WALL LIGHT



EXCEL E275



- White RAL9003
- Grey RAL7045
- Anthracite RAL7016
- Black RAL9005

Koolmesh
-POWERED BY HYTRONIK
Bluetooth 5.0 SIG mesh




RGB light color available




WALL LIGHT

Dimensions

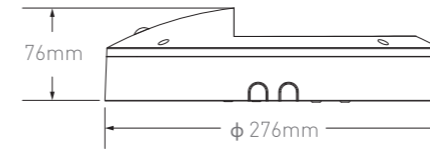

Photometrics

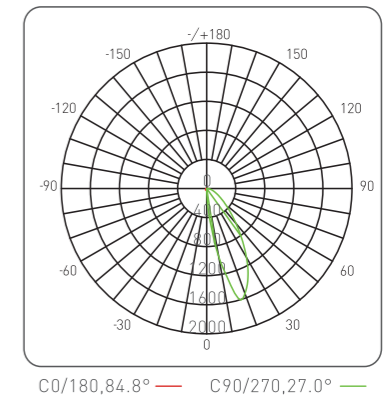

Features & Benefits

Excel, stylish cast-aluminum asymmetric light, is ideally used for stair, corridor, aisle, pathways, traffic routes. Thanks to uniform light on the ground, the luminaire mark out traffic routes and passageways efficiently, which help passers-by quickly adapt to even darker areas.

Function



Lumen Output

Model	Power	3000K	4000K	5000K	Colour Temp.	Lumen Efficiency
E275	18W	630lm	730lm	810lm (±10%)	3000K	35 lm/W
					4000K	40 lm/W
					5000K	45 lm/W

• Customized higher lumen output available

Specification

Input Voltage	CRI	Power Factor	SDCM	Beam Angle	Operation Temp.	IP/IK
220-240VAC	>80	>0.9	3	30°	-20 °C~+40 °C	IP65/IK10
Fitting Material	Class	Standard Lifespan	Premium Lifespan	Standard		
Cast Aluminum	I	L70B50: 50,000h	L70B50: 125,000h / L80B10: 65,000h	Standard	EN60598-2-1/EN55015/EN62778	