


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:222.1V I:0.0786A P:16.281W PF:0.9326 Freq:49.99Hz Lamp Flux:943.605x1 lm		
Name: A6060-HC (阅读灯) 2700K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 57.96 lm/W			
MODEL		I _{max} (cd)	3007	S/MH (C0/180)	0.47
NOMINAL POWER (W)	16	LOR (%)	100.0	S/MH (C90/270)	0.44
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	943.60	η UP, DN (C0-180)	0.3, 50.1
NOMINAL FLUX (lm)	943.605	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.7, 48.8
LAMPS INSIDE	1	η up (%)	1.1	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	222.1	η down (%)	98.9	CIBSE SHR MAX	0.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

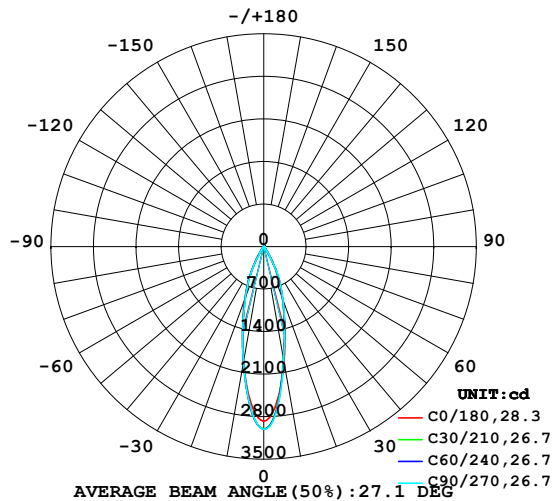

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

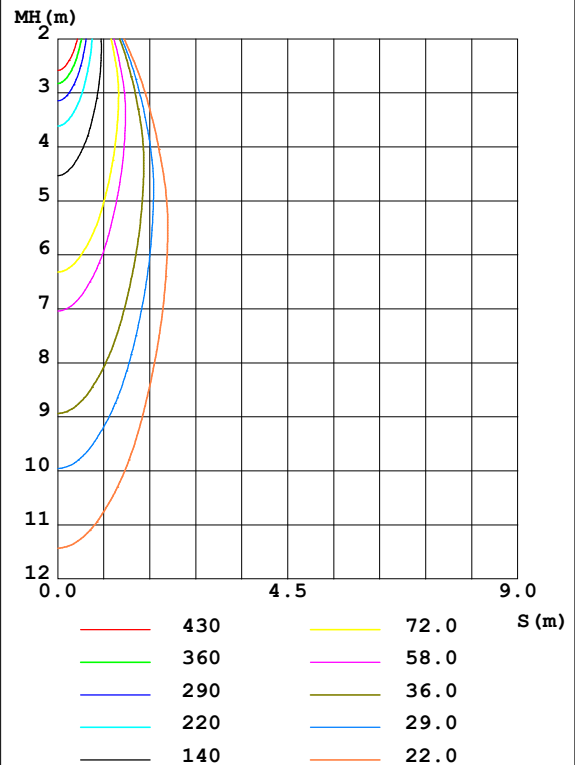

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-06-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks: 电源: BK-DKL022-A0600AD (400mA)、HCD0
38/BT灯板: GR6D-564-2X10S2P-V1.0
灯珠: L128-2797RA35000D1, 全光谱
(2700K)
透镜: 24°透镜

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1928	1876	1899	1876	1928	1922	1926	1922	0- 10	225.8	225.8	23.9,23.9
20	920.9	909.3	923.5	909.3	920.9	889.0	877.2	889.0	10- 20	369.6	595.4	63.1,63.1
30	287.9	274.0	294.6	274.0	287.9	230.7	216.6	230.7	20- 30	258.5	853.9	90.5,90.5
40	34.59	35.83	35.33	35.83	34.59	28.41	20.65	28.41	30- 40	62.97	916.9	97.2,97.2
50	5.142	4.417	3.530	4.417	5.142	4.695	3.895	4.695	40- 50	9.877	926.7	98.2,98.2
60	2.500	1.902	1.670	1.902	2.500	2.240	1.983	2.240	50- 60	2.731	929.5	98.5,98.5
70	1.546	0.9726	0.8674	0.9726	1.546	1.731	1.633	1.731	60- 70	1.657	931.1	98.7,98.7
80	1.182	0.4312	0.4220	0.4312	1.182	1.787	1.746	1.787	70- 80	1.286	932.4	98.8,98.8
90	1.082	0.2148	0.1903	0.2148	1.082	1.984	1.971	1.984	80- 90	1.181	933.6	98.9,98.9
100	1.540	0.5645	0.4977	0.5645	1.540	2.397	2.380	2.397	90-100	1.391	935.0	99.1,99.1
110	2.039	1.091	0.9683	1.091	2.039	2.757	2.722	2.757	100-110	1.807	936.8	99.3,99.3
120	2.335	1.433	1.283	1.433	2.335	3.006	2.892	3.006	110-120	2.081	938.9	99.5,99.5
130	2.184	1.343	1.270	1.343	2.184	2.762	2.689	2.762	120-130	1.959	940.8	99.7,99.7
140	1.576	1.073	1.064	1.073	1.576	1.933	1.989	1.933	130-140	1.403	942.2	99.9,99.9
150	1.037	0.8113	0.8234	0.8113	1.037	1.156	1.205	1.156	140-150	0.7900	943.0	99.9,99.9
160	0.6666	0.6207	0.6173	0.6207	0.6666	0.6798	0.7012	0.6798	150-160	0.3800	943.4	100,100
170	0.5033	0.4763	0.4739	0.4763	0.5033	0.4804	0.4741	0.4804	160-170	0.1611	943.6	100,100
180	0.4473	0.4222	0.4297	0.4222	0.4473	0.4227	0.4297	0.4227	170-180	0.0431	943.6	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 923.99 lm

%lum = 97.9%

%lamp = 97.9%

Conical surface Flux(120deg): 929.46 lm

%lum = 98.5%


%lamp = 98.5%

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DKL022-A0600AD (400mA)、HCD0
38/BT灯板: GR6D-564-2X10S2P-V1.0
灯珠: L128-2797RA35000D1, 全光谱
(2700K)
透镜:24°透镜

LUMINANCE LIMITATION CURVES

Test:U:222.1V I:0.0786A P:16.281W PF:0.9326 Freq:49.99Hz		
Lamp Flux:943.605x1 lm		
Name: A6060-HC (阅读灯) 2700K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

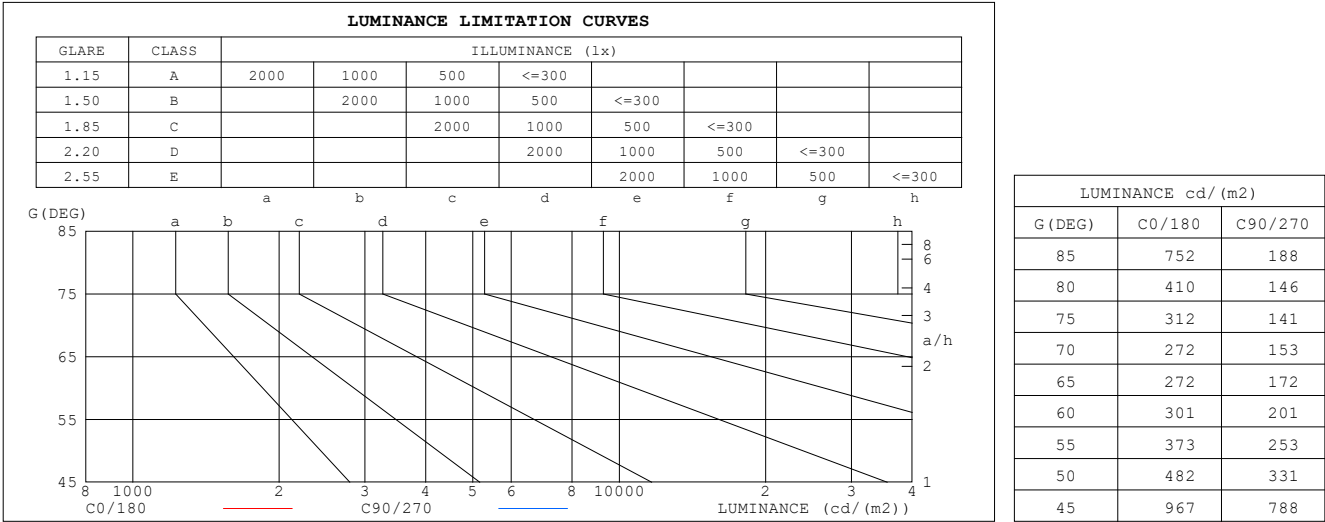


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DKL022-A0600AD (400mA)、HCD0
38/BT灯板: GR6D-564-2X10S2P-V1.0
灯珠: L128-2797RA35000D1, 全光谱
(2700K)
透镜:24°透镜

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:222.1V I:0.0786A P:16.281W PF:0.9326 Freq:49.99Hz		
Lamp Flux:943.605x1 lm		
Name: A6060-HC (阅读灯) 2700K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.01	1.01	1.01	.99
1.0	1.12	1.10	1.08	1.10	1.08	1.06	1.05	1.04	1.03	1.02	1.00	.99	.98	.97	.96	.94
2.0	1.06	1.02	.90	1.04	1.01	.98	1.01	.98	.96	.98	.96	.94	.95	.93	.92	.90
3.0	1.00	.96	.93	.99	.95	.92	.96	.93	.91	.94	.91	.89	.91	.89	.88	.86
4.0	.95	.91	.88	.94	.90	.87	.92	.89	.86	.90	.87	.85	.88	.86	.84	.82
5.0	.91	.86	.83	.90	.86	.83	.88	.85	.82	.87	.84	.81	.85	.82	.80	.79
6.0	.87	.82	.79	.86	.82	.79	.85	.81	.78	.84	.80	.77	.82	.79	.77	.76
7.0	.84	.79	.75	.83	.78	.75	.82	.78	.75	.80	.77	.74	.79	.76	.74	.73
8.0	.80	.75	.72	.80	.75	.72	.79	.75	.72	.78	.74	.71	.77	.73	.71	.70
9.0	.77	.72	.69	.77	.72	.69	.76	.72	.69	.75	.71	.69	.74	.71	.68	.67
10.0	.74	.70	.67	.74	.70	.67	.73	.69	.66	.72	.69	.66	.72	.68	.66	.65

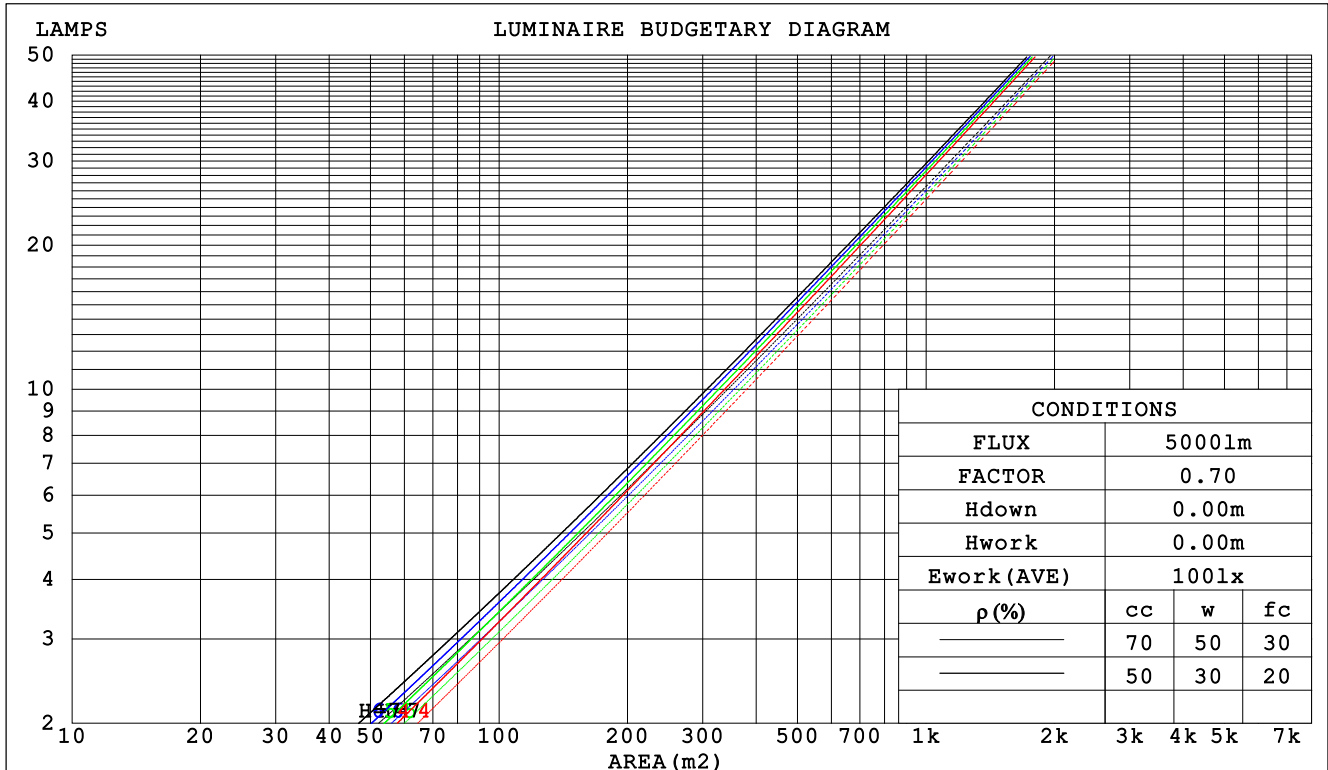

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DKL022-A0600AD (400mA)、HCD0
38/BT灯板: GR6D-564-2X10S2P-V1.0
灯珠: L128-2797RA35000D1, 全光谱
(2700K)
透镜:24°透镜

WEC AND CCEC

Test:U:222.1V I:0.0786A P:16.281W PF:0.9326 Freq:49.99Hz		
Lamp Flux:943.605x1 lm		
Name: A6060-HC (阅读灯) 2700K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients (WEC)										
0.0																	
1.0	.153	.087	.028	.146	.083	.026	.133	.076	.024	.121	.070	.022	.110	.064	.021		
2.0	.143	.078	.024	.137	.075	.023	.126	.070	.022	.116	.065	.020	.107	.060	.019		
3.0	.134	.071	.021	.129	.069	.021	.120	.065	.020	.111	.061	.019	.103	.057	.018		
4.0	.126	.066	.019	.122	.064	.019	.114	.061	.018	.107	.057	.017	.100	.054	.017		
5.0	.120	.061	.018	.116	.060	.017	.109	.057	.017	.103	.054	.016	.097	.052	.016		
6.0	.114	.057	.016	.111	.056	.016	.105	.054	.016	.099	.052	.015	.094	.049	.015		
7.0	.109	.054	.015	.106	.053	.015	.101	.051	.015	.096	.049	.014	.091	.047	.014		
8.0	.104	.051	.014	.101	.050	.014	.097	.048	.014	.092	.047	.013	.088	.045	.013		
9.0	.099	.048	.013	.097	.047	.013	.093	.046	.013	.089	.045	.013	.085	.043	.013		
10.0	.095	.046	.013	.094	.045	.013	.090	.044	.012	.086	.043	.012	.083	.042	.012		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.199	.199	.199	.170	.170	.170	.116	.116	.116	.067	.067	.067	.021	.021	.021		
1.0	.178	.166	.155	.152	.142	.133	.104	.098	.092	.060	.057	.054	.019	.018	.017		
2.0	.161	.141	.124	.138	.121	.107	.094	.084	.075	.054	.049	.044	.017	.016	.014		
3.0	.147	.122	.102	.126	.105	.088	.086	.073	.062	.050	.043	.036	.016	.014	.012		
4.0	.135	.107	.085	.116	.092	.074	.080	.064	.052	.046	.038	.031	.015	.012	.010		
5.0	.125	.095	.072	.107	.082	.063	.074	.057	.044	.043	.034	.026	.014	.011	.009		
6.0	.117	.085	.062	.100	.073	.054	.069	.051	.038	.040	.030	.023	.013	.010	.007		
7.0	.110	.077	.054	.094	.067	.047	.065	.047	.033	.038	.028	.020	.012	.009	.007		
8.0	.104	.070	.048	.089	.061	.041	.062	.043	.029	.036	.025	.018	.012	.008	.006		
9.0	.098	.065	.042	.085	.056	.037	.059	.040	.026	.034	.023	.016	.011	.008	.005		
10.0	.093	.060	.038	.081	.052	.033	.056	.037	.024	.033	.022	.014	.011	.007	.005		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DKL022-A0600AD (400mA)、HCD0
38/BT灯板: GR6D-564-2X10S2P-V1.0
灯珠: L128-2797RA35000D1, 全光谱
(2700K)
透镜:24°透镜

UGR(Unified Glare Rating) Table

Test:U:222.1V I:0.0786A P:16.281W PF:0.9326 Freq:49.99Hz Lamp Flux:943.605x1 lm											
Name: A6060-HC (阅读灯) 2700K					Type: 矩形						
MFR.:					DIM.: 595*595*71 (mm)						
					SUR.: 553*30.3 (mm)						
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
	3H	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
	4H	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
	6H	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
	8H	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
	12H	0.0	0.0	0.0	0.0	0.4	0.0	0.0	0.0	0.0	
4H	2H	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
	3H	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
	4H	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
	6H	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
	8H	0.0	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.0	
	12H	0.0	0.1	0.2	0.6	1.1	0.0	0.0	0.0	0.0	
8H	4H	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
	6H	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
	8H	0.0	0.0	0.0	0.0	0.2	0.0	0.0	0.0	0.0	
	12H	0.0	0.3	0.6	0.8	1.4	0.0	0.0	0.0	0.0	
12H	4H	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
	6H	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	
	8H	0.0	0.0	0.0	0.0	0.2	0.0	0.0	0.0	0.0	
CIE190: 2010											

CIE190: 2010
Area: 0.0166 m2

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DKL022-A0600AD (400mA)、HCD0
38/BT灯板: GR6D-564-2X10S2P-V1.0
灯珠: L128-2797RA35000D1, 全光谱
(2700K)
透镜:24°透镜

UTILIZATION FACTORS TABLE

Test:U:222.1V I:0.0786A P:16.281W PF:0.9326 Freq:49.99Hz Lamp Flux:943.605x1 lm		
Name: A6060-HC (阅读灯) 2700K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	90	84	80	89	84	80	89	83	80	77
0.80	97	91	88	96	91	88	95	90	87	84
1.00	101	96	92	100	95	92	98	95	91	88
1.25	104	99	96	103	99	96	101	98	95	91
1.50	107	102	99	106	102	99	103	100	98	93
2.00	109	105	102	108	104	101	105	102	100	95
2.50	111	107	104	109	106	103	106	103	101	95
3.00	112	109	106	110	107	105	107	105	103	96
4.00	114	111	109	112	110	108	108	106	105	98
5.00	115	113	111	113	111	110	109	108	106	99
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks: 电源: BK-DKL022-A0600AD (400mA)、HCD0
38/BT灯板: GR6D-564-2X10S2P-V1.0
灯珠: L128-2797RA35000D1, 全光谱
(2700K)
透镜: 24°透镜

ISOCANDELA DIAGRAM

Test:U:222.1V I:0.0786A P:16.281W PF:0.9326 Freq:49.99Hz Lamp Flux:943.605x1 lm		
Name: A6060-HC (阅读灯) 2700K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

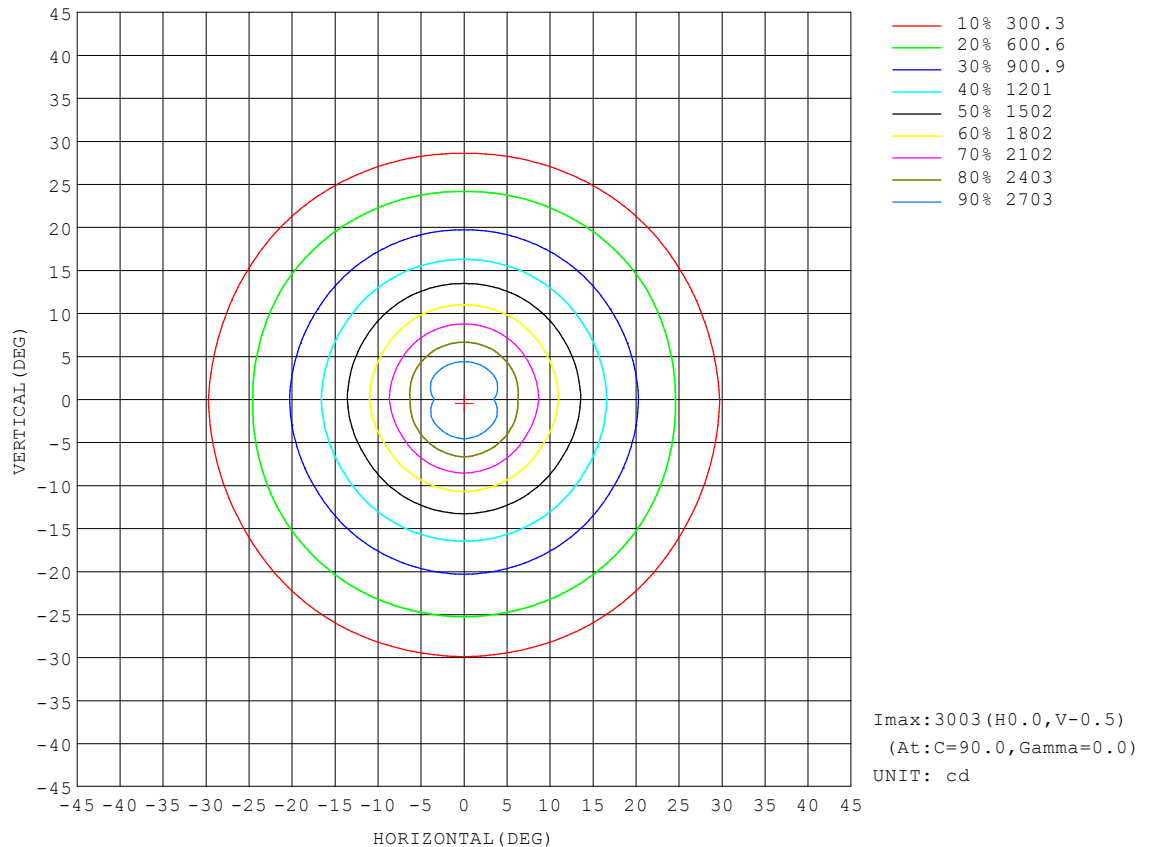


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DKL022-A0600AD (400mA)、HCD0
38/BT灯板: GR6D-564-2X10S2P-V1.0
灯珠: L128-2797RA35000D1, 全光谱
(2700K)
透镜:24°透镜

AAI Figure

Test:U:222.1V I:0.0786A P:16.281W PF:0.9326 Freq:49.99Hz Lamp Flux:943.605x1 lm		
Name: A6060-HC (阅读灯) 2700K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

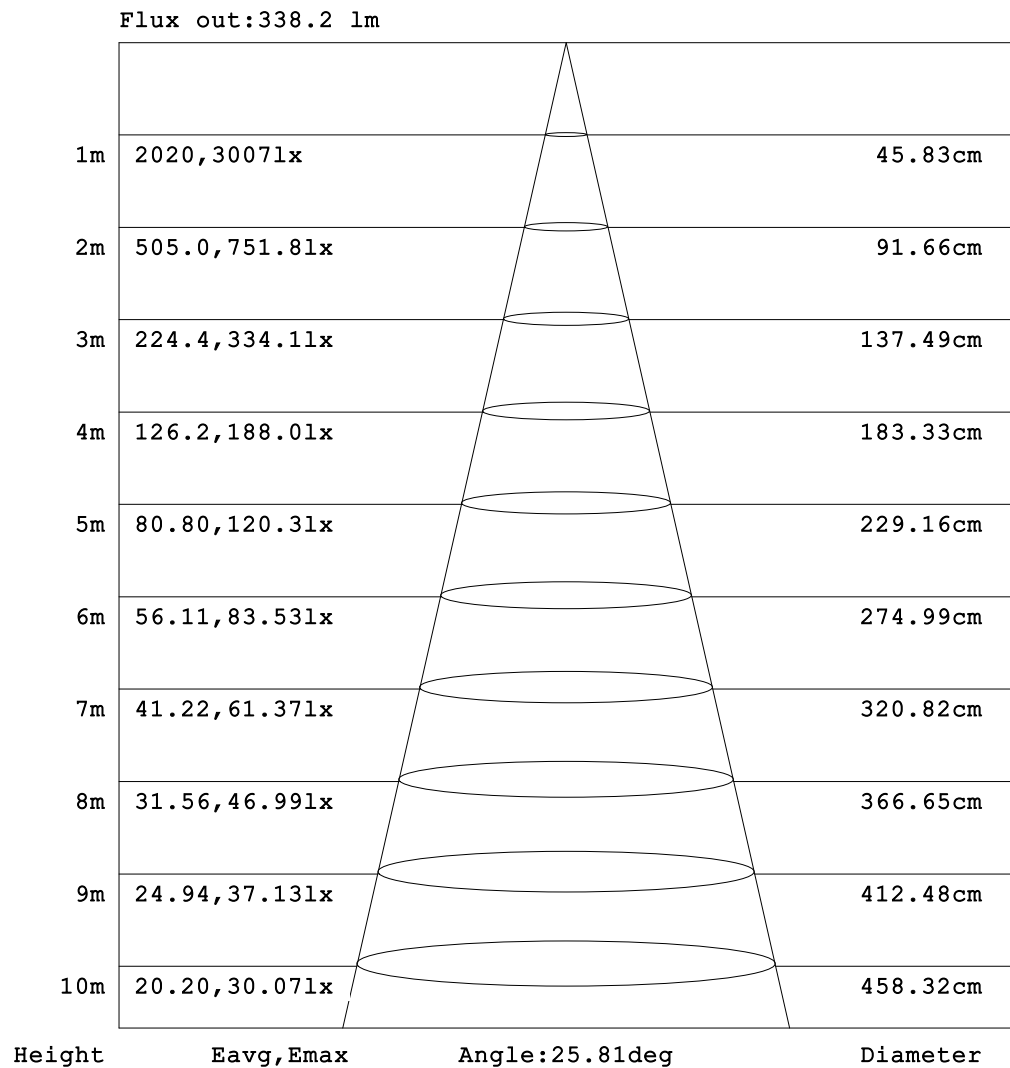


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DKL022-A0600AD (400mA)、HCD0
38/BT灯板: GR6D-564-2X10S2P-V1.0
灯珠: L128-2797RA35000D1, 全光谱
(2700K)
透镜:24°透镜

ISOLUX DIAGRAM


Test:U:222.1V I:0.0786A P:16.281W PF:0.9326 Freq:49.99Hz Lamp Flux:943.605x1 lm		
Name: A6060-HC (阅读灯) 2700K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

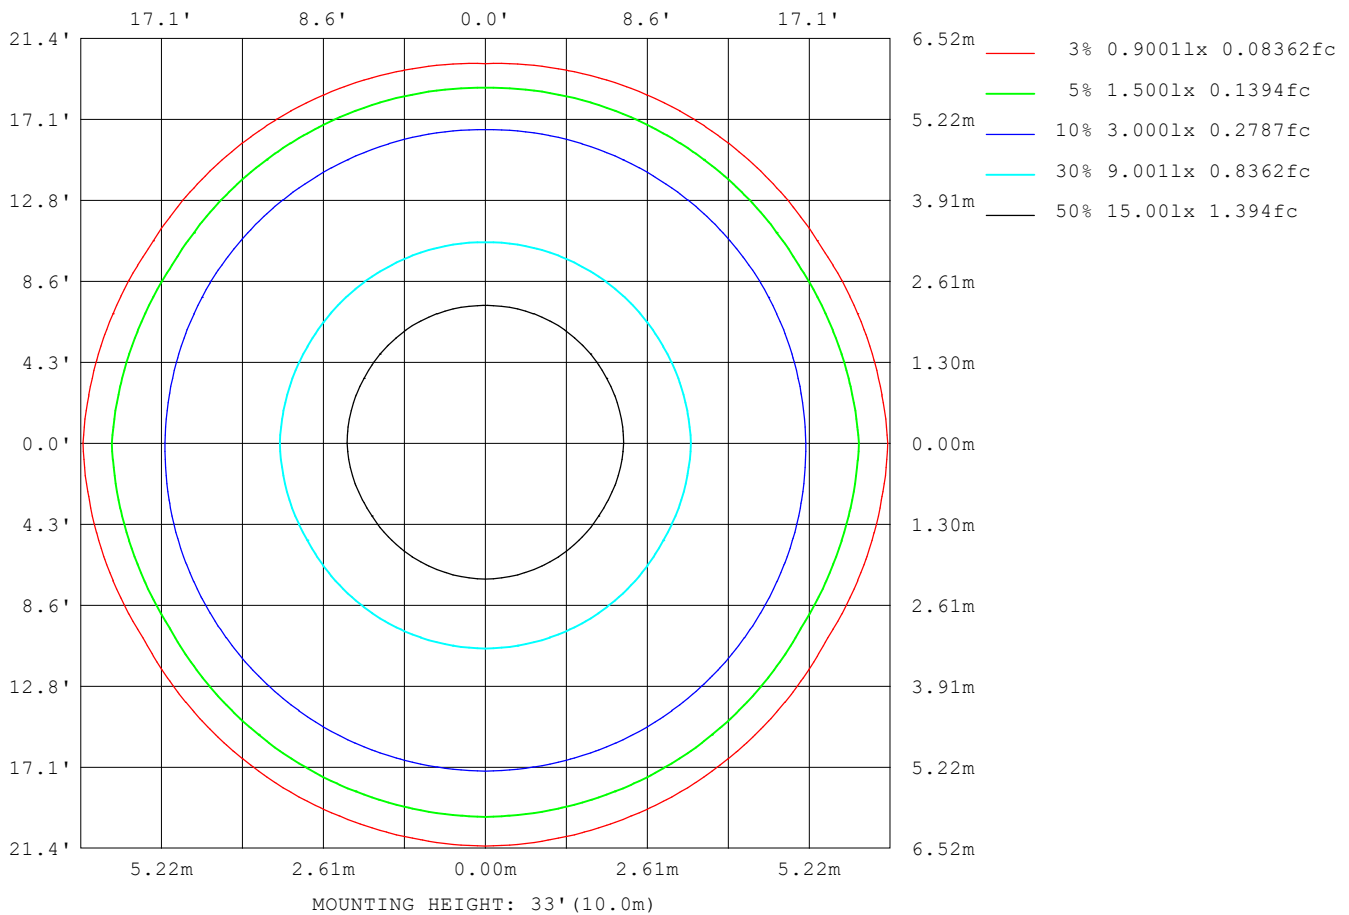

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DKL022-A0600AD (400mA)、HCD0
38/BT灯板: GR6D-564-2X10S2P-V1.0
灯珠: L128-2797RA35000D1, 全光谱
(2700K)
透镜:24°透镜

Planar Illuminance Curve

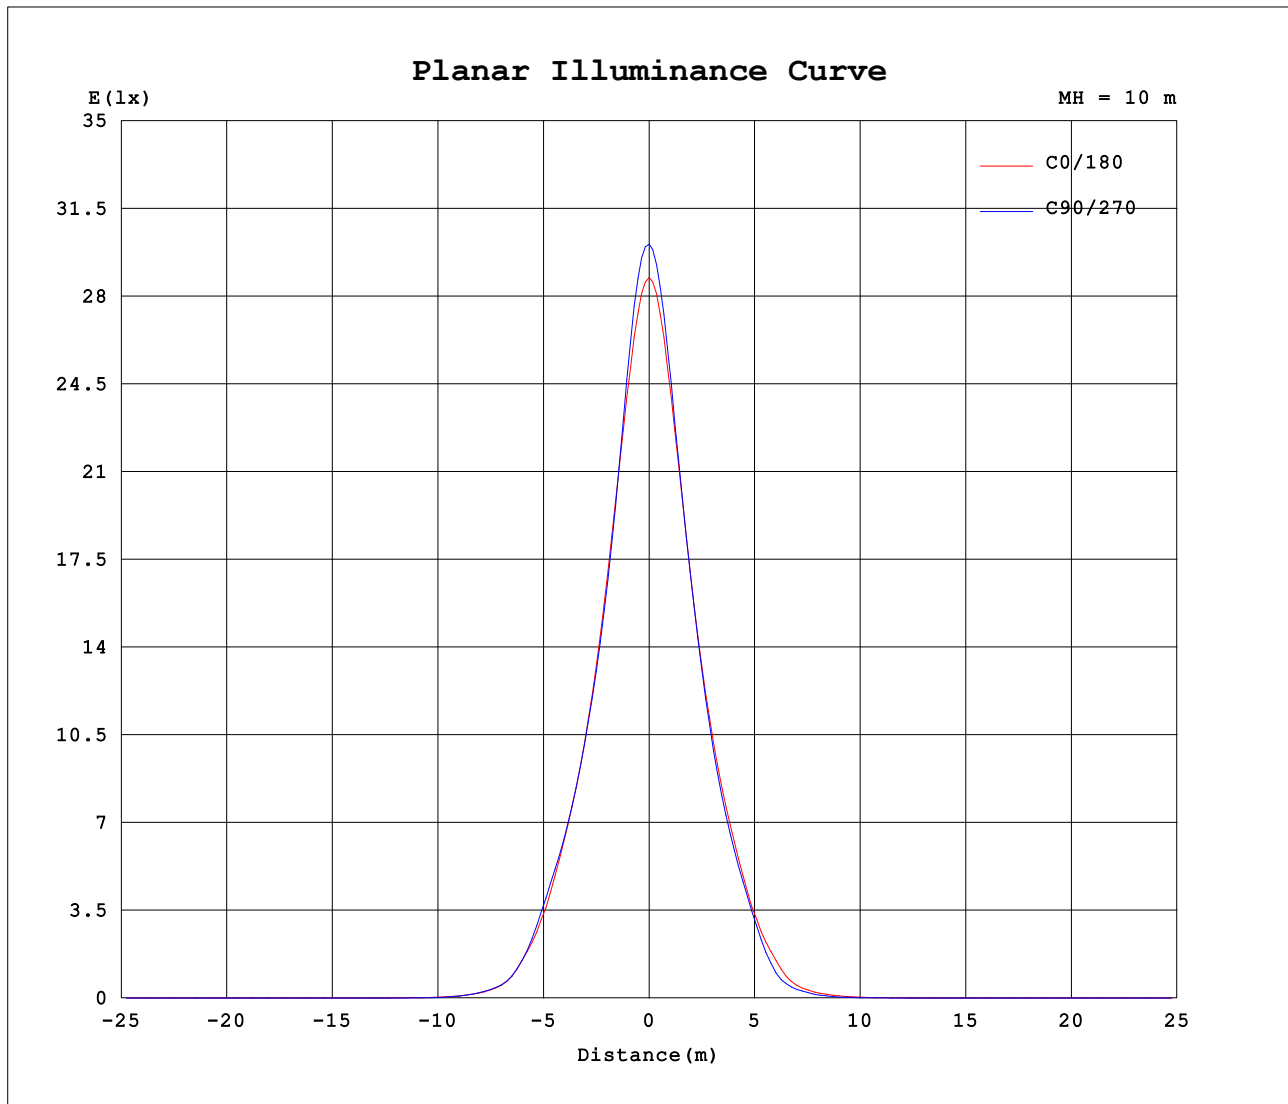

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2024-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity: 65.0%
Test Distance: 8.000m [K=0.7125]
Remarks: 电源: BK-DKL022-A0600AD (400mA)、HCD0
38/BT灯板: GR6D-564-2X10S2P-V1.0
灯珠: L128-2797RA35000D1, 全光谱
(2700K)
透镜: 24°透镜

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:222.1V I:0.0786A P:16.281W PF:0.9326 Freq:49.99Hz Lamp Flux:943.605x1 lm		
Name: A6060-HC (阅读灯) 2700K	Type: 矩形	
MFR.:	DIM.: 595*595*71 (mm)	
	SUR.: 553*30.3 (mm)	

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	2875	2998	3006	3007	3006	2998	2875	2998	3006	3007	3006	2998						
5	2546	2616	2633	2652	2633	2616	2546	2629	2631	2625	2631	2629						
10	1928	1870	1881	1899	1881	1870	1928	1912	1932	1926	1932	1912						
15	1352	1324	1333	1335	1333	1324	1352	1337	1334	1330	1334	1337						
20	921	904	915	924	915	904	921	893	885	877	885	893						
25	571	597	611	618	611	597	571	576	557	544	557	576						
30	288	263	285	295	285	263	288	237	225	217	225	237						
35	93.5	87.1	93.0	96.1	93.0	87.1	93.5	78.2	72.9	64.9	72.9	78.2						
40	34.6	34.8	36.9	35.3	36.9	34.8	34.6	30.5	26.3	20.6	26.3	30.5						
45	11.3	11.7	11.8	9.25	11.8	11.7	11.3	11.1	9.19	6.61	9.19	11.1						
50	5.14	4.49	4.34	3.53	4.34	4.49	5.14	5.03	4.36	3.90	4.36	5.03						
55	3.55	2.87	2.65	2.41	2.65	2.87	3.55	3.28	2.93	2.66	2.93	3.28						
60	2.50	1.97	1.83	1.67	1.83	1.97	2.50	2.34	2.14	1.98	2.14	2.34						
65	1.91	1.43	1.31	1.21	1.31	1.43	1.91	1.95	1.82	1.72	1.82	1.95						
70	1.55	1.00	0.94	0.87	0.94	1.00	1.55	1.76	1.70	1.63	1.70	1.76						
75	1.34	0.67	0.63	0.60	0.63	0.67	1.34	1.75	1.68	1.68	1.68	1.75						
80	1.18	0.45	0.41	0.42	0.41	0.45	1.18	1.83	1.74	1.75	1.74	1.83						
85	1.09	0.28	0.28	0.27	0.28	0.28	1.09	1.91	1.84	1.82	1.84	1.91						
90	1.08	0.21	0.22	0.19	0.22	0.21	1.08	1.99	1.97	1.97	1.97	1.99						
95	1.30	0.36	0.33	0.31	0.33	0.36	1.30	2.20	2.19	2.19	2.19	2.20						
100	1.54	0.60	0.53	0.50	0.53	0.60	1.54	2.41	2.39	2.38	2.39	2.41						
105	1.80	0.87	0.77	0.73	0.77	0.87	1.80	2.60	2.57	2.56	2.57	2.60						
110	2.04	1.15	1.03	0.97	1.03	1.15	2.04	2.78	2.73	2.72	2.73	2.78						
115	2.23	1.38	1.24	1.17	1.24	1.38	2.23	2.94	2.87	2.84	2.87	2.94						
120	2.33	1.51	1.36	1.28	1.36	1.51	2.33	3.07	2.95	2.89	2.95	3.07						
125	2.33	1.50	1.37	1.31	1.37	1.50	2.33	3.04	2.91	2.85	2.91	3.04						
130	2.18	1.38	1.31	1.27	1.31	1.38	2.18	2.80	2.73	2.69	2.73	2.80						
135	1.90	1.23	1.20	1.18	1.20	1.23	1.90	2.36	2.39	2.39	2.39	2.36						
140	1.58	1.08	1.07	1.06	1.07	1.08	1.58	1.90	1.97	1.99	1.97	1.90						
145	1.28	0.93	0.94	0.94	0.94	0.93	1.28	1.48	1.54	1.57	1.54	1.48						
150	1.04	0.80	0.82	0.82	0.82	0.80	1.04	1.13	1.18	1.21	1.18	1.13						
155	0.83	0.70	0.72	0.71	0.72	0.70	0.83	0.85	0.90	0.92	0.90	0.85						
160	0.67	0.62	0.62	0.62	0.62	0.62	0.67	0.67	0.69	0.70	0.69	0.67						
165	0.57	0.55	0.54	0.54	0.54	0.55	0.57	0.56	0.56	0.56	0.56	0.57						
170	0.50	0.49	0.47	0.47	0.47	0.49	0.50	0.49	0.47	0.47	0.47	0.49						
175	0.46	0.43	0.42	0.43	0.42	0.43	0.46	0.44	0.43	0.43	0.43	0.44						
180	0.45	0.42	0.42	0.43	0.42	0.42	0.45	0.42	0.42	0.43	0.42	0.45						

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2024-06-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.443
Humidity:65.0%
Test Distance:8.000m [K=0.7125]
Remarks: 电源: BK-DKL022-A0600AD (400mA)、HCD0
38/BT灯板: GR6D-564-2X10S2P-V1.0
灯珠: L128-2797RA35000D1, 全光谱
(2700K)
透镜:24°透镜