





Aurora is a stylish PC luminaire with a slim profile ensuring its modern look. It is ideal for setting up in supermarkets, institutions and schools, or residential areas.

- 1 • IP54 water-proof • IK10 vandal-proof
- 2 • Optional selectable color temperature • Optional selectable power
- 3 • Ceiling / wall / suspended / recessed / track mounted • Quick and easy installation with separate base
- 4 • Wide choice of intelligent functions, with / without Bluetooth, human centric, sensor, emergency, DALI, etc.

Photometrics

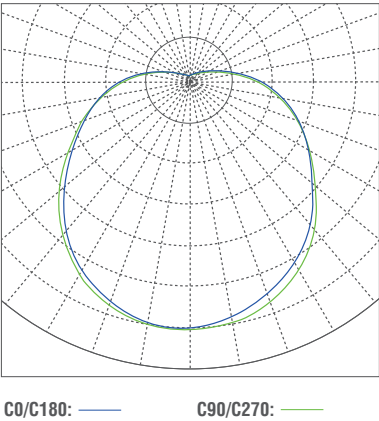

Dimension

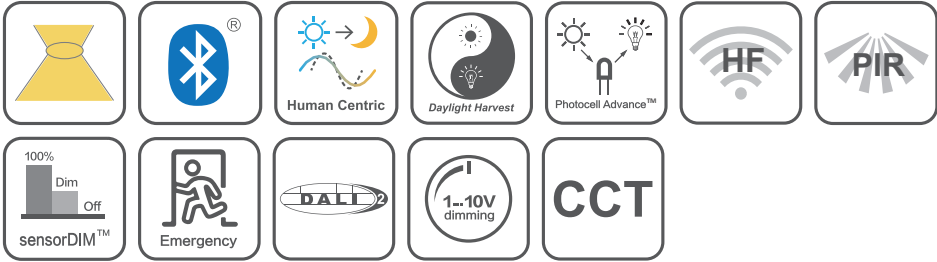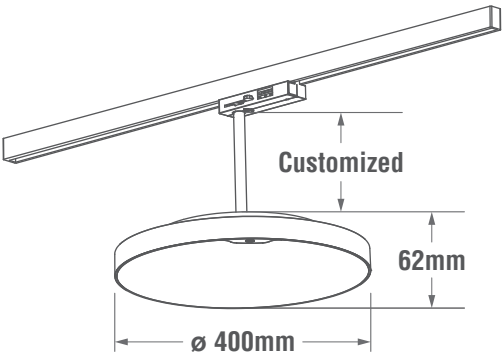

Lumen Output

Model	Power	3000K	4000K	5000K
		105 lm/W	110 lm/W	115 lm/W
A400	22W	2450 lm	2520 lm	2590 lm
A400	28W	3020 lm	3070 lm	3120 lm

• Lumen may fluctuate between ± 10%. Customized higher lumen output available. Max power: 32W.

Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	120°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP54
IK Rating	IK10
Fitting Material	Polycarbonate

Electrical Class	II
Standard Lifespan	L70B50: 68,000h
Premium Lifespan	L70B50: 176,000h L80B10: 95,000h
Standard	EN60598-2-1 / EN55015 / EN62778 / EN60598-2-22
Emergency Lumen	200 ~ 400 lm
Battery	3h Duration

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
AOR067	A400	22W		●		●					30K	116 lm/W	ø 400 * H 62
AOR068	A400-IND	32W	●								30K	88/116 lm/W	ø 400 * H 62