

RECESSED LIGHT



NAISE N260
Recessed Mounted


White
RAL9003




Naise is a compact economical PC luminaire . Well suited to be used as a basic or general interior light source.

- 1 • Reserved BESA holes, Key holes
- Cable entry from side and back
- Through wiring from side to side
- 2 • IP54 water-proof
- 3 • Ceiling / Wall mounted
- Recessed mounted with accessory
- 4 • Wide choice of intelligent functions, with/without sensor, emergency, etc.


Photometrics

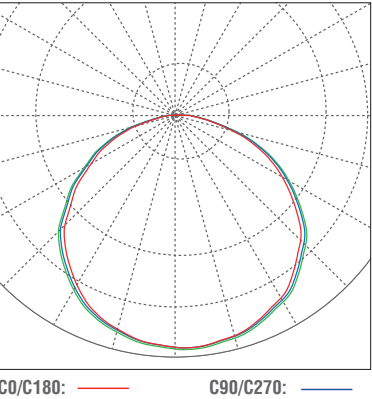

Dimension

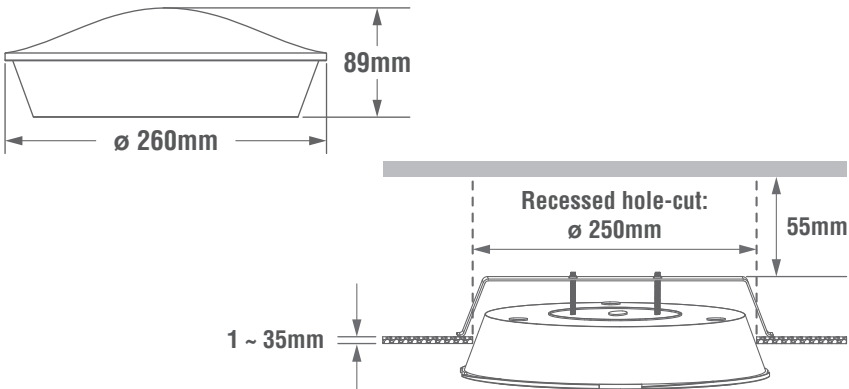

RECESSED LIGHT



Lumen Output

Model	Power	3000K	4000K	5000K
		85 lm/W	90 lm/W	95 lm/W
N260	12W	1020 lm	1068 lm	1116 lm
N260	15W	1275 lm	1335 lm	1395 lm

• Lumen may fluctuate between ± 10%. Customized higher lumen output available.

Specification

Input Voltage	220-240VAC	Fitting Material	Polycarbonate
CRI	>80	Electrical Class	II
Power Factor	>0.9	Lifespan	L70B50: 65,000h
SDCM	3	Standard	EN60598-2-1 / EN55015 / EN62778 / EN60598-2-22
Beam Angle	110°	Emergency Lumen	200 ~ 400 lm
Operation Temp.	-20°C ~ +40°C	Battery	3h Duration
IP Rating	IP54		

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
NAI001	N260	12W		●							30K	90 lm/W	ø 260 * H 89