







Titan, the highbay light, with ventilation slots that guarantees optimal air flow and ready for smart pluggable sensor functions, is perfect for warehouse, factory, sport stadium.

Photometrics

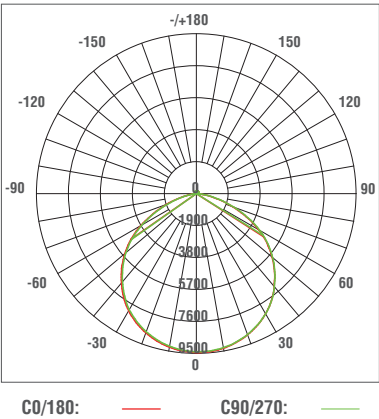

Dimension

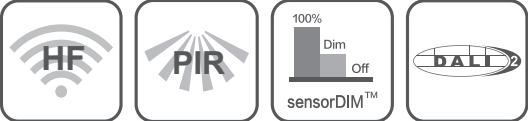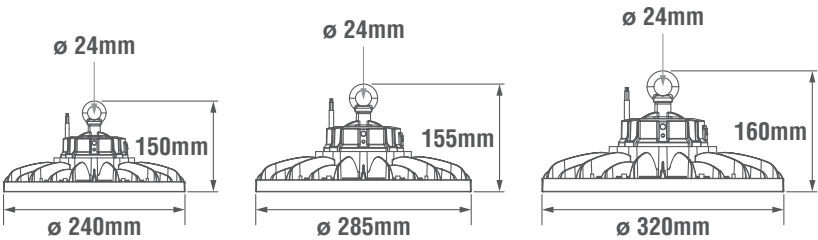

Lumen Output

Model	Power	3000K	4000K	5000K
		145 lm/W	150 lm/W	155 lm/W
T240	100W	14500 lm	15000 lm	15500 lm
T285	150W	21750 lm	22500 lm	23250 lm
T320	180W	26100 lm	27000 lm	27900 lm

• Lumen may fluctuate between ± 10%. Customized higher lumen output available.

Specification

Input Voltage	100-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	60° / 90° / 120°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP65

IK Rating	IK08
Fitting Material	Cast Aluminum
Electrical Class	I
Lifespan	L70B50: 171,000h L80B10: 89,000h
Standard	EN60598-2-1 / EN55015 / EN62778

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
TIT001	T320	240W						●			40K	150 lm/W	ø 320 * H 160