


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:221.70V I:0.1130A P:23.700W PF:0.9440 Freq:50.00Hz Lamp Flux:2536.56x1 lm		
NAME: D320 24W 000 4000K	TYPE:圆柱形	
MFR.:	DIM.: $\phi 320 \times 94\text{mm}$	
	SUR.: $\phi 320\text{mm}$	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 107.03 lm/W			
MODEL		Imax(cd)	712.1	S/MH(C0/180)	1.25
NOMINAL POWER(W)	24	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	222	TOTAL FLUX(lm)	2536.6	η UP,DN(C0-180)	4.0,45.0
NOMINAL FLUX(lm)	2536.56	CIE CLASS	DIRECT	η UP,DN(C180-360)	4.5,46.5
LAMPS INSIDE	1	η up(%)	8.5	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	221.8	η down(%)	91.5	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

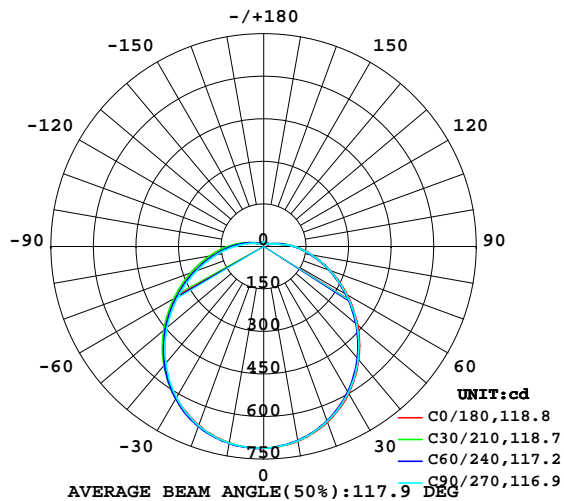

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

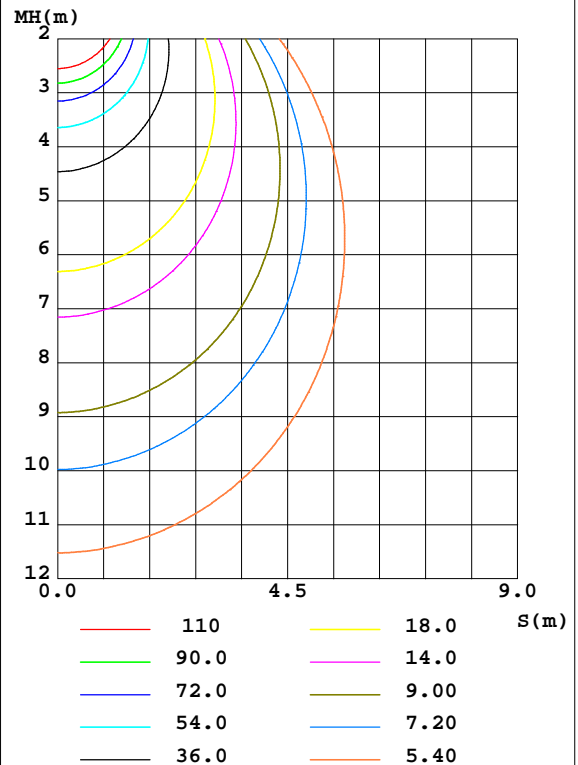

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2019-05-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: LF-GIR030YI0750H,D320-10S9P-V1.1

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	697.0	694.4	695.2	699.0	702.5	704.4	703.4	700.4	0- 10	67.35	67.35	2.66,2.66
20	658.9	654.2	656.2	663.1	670.4	674.2	672.2	666.3	10- 20	193.3	260.7	10.3,10.3
30	599.5	593.5	596.7	605.7	616.2	621.0	615.2	609.6	20- 30	294.3	555.0	21.9,21.9
40	522.0	515.3	518.5	530.0	543.0	546.8	536.6	532.4	30- 40	357.3	912.3	36,36
50	433.5	425.5	428.9	441.2	456.0	457.1	445.0	441.9	40- 50	375.7	1288	50.8,50.8
60	339.4	332.8	336.2	347.4	361.5	360.2	346.3	345.0	50- 60	352.3	1640	64.7,64.7
70	250.9	245.6	248.4	258.1	270.7	267.2	251.7	253.2	60- 70	297.5	1938	76.4,76.4
80	173.2	168.9	171.6	179.1	190.6	185.1	167.5	172.8	70- 80	227.1	2165	85.3,85.3
90	109.1	106.5	106.8	114.7	123.9	120.9	101.5	110.5	80- 90	155.8	2321	91.5,91.5
100	53.20	59.82	52.46	66.64	62.11	72.70	58.51	64.62	90-100	94.03	2415	95.2,95.2
110	25.22	30.20	28.75	34.36	34.79	40.05	33.99	34.61	100-110	49.63	2464	97.2,97.2
120	15.79	17.50	17.12	18.84	20.27	22.59	20.06	21.45	110-120	25.25	2490	98.1,98.1
130	12.96	13.38	15.15	13.74	14.67	15.71	14.56	14.66	120-130	14.69	2504	98.7,98.7
140	13.19	13.15	12.92	13.12	13.70	13.97	13.80	13.62	130-140	10.77	2515	99.2,99.2
150	14.16	13.99	13.94	14.09	14.42	14.55	14.77	14.44	140-150	8.679	2524	99.5,99.5
160	15.13	15.08	15.20	15.22	15.43	15.49	15.69	15.44	150-160	6.842	2531	99.8,99.8
170	16.02	15.98	16.29	16.22	16.04	16.28	16.51	16.35	160-170	4.463	2535	99.9,99.9
180	16.29	16.39	16.77	16.59	16.34	16.38	16.83	16.60	170-180	1.562	2537	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:DAMIN
 Test Date:2019-05-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity:65.0%
 Test Distance:8.000m [K=0.7063]
 Remarks: LF-GIR030YI0750H,D320-10S9P-V1.1

LUMINANCE LIMITATION CURVES

Test:U:221.70V I:0.1130A P:23.700W PF:0.9440 Freq:50.00Hz Lamp Flux:2536.56x1 lm		
NAME: D320 24W 000 4000K	TYPE:圆柱形	
MFR.:	DIM.: $\phi 320 \times 94\text{mm}$	
	SUR.: $\phi 320\text{mm}$	

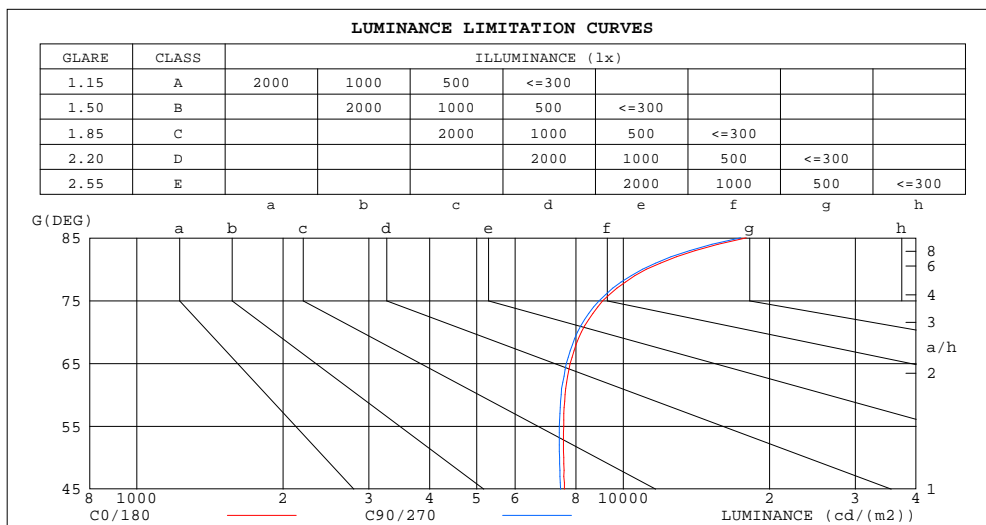


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: LF-GIR030YI0750H, D320-10S9P-V1.1

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:221.70V I:0.1130A P:23.700W PF:0.9440 Freq:50.00Hz Lamp Flux:2536.56x1 lm		
NAME: D320 24W 000 4000K	TYPE:圆柱形	
MFR.:	DIM.: $\phi 320 \times 94\text{mm}$	
	SUR.: $\phi 320\text{mm}$	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.17	1.17	1.17	1.13	1.13	1.13	1.06	1.06	1.06	1.00	1.00	1.00	.94	.94	.94	.91
1.0	.99	.94	.89	.96	.91	.87	.90	.86	.83	.84	.81	.79	.79	.77	.75	.72
2.0	.85	.78	.71	.83	.76	.70	.78	.72	.67	.73	.68	.64	.69	.65	.61	.58
3.0	.74	.65	.58	.72	.64	.57	.68	.61	.55	.64	.58	.53	.60	.55	.51	.49
4.0	.65	.56	.49	.64	.55	.48	.60	.53	.47	.57	.50	.45	.53	.48	.44	.41
5.0	.58	.49	.42	.57	.48	.41	.54	.46	.40	.51	.44	.39	.48	.42	.38	.35
6.0	.52	.43	.36	.51	.42	.36	.48	.41	.35	.46	.39	.34	.43	.38	.33	.31
7.0	.47	.38	.32	.46	.38	.32	.44	.36	.31	.42	.35	.30	.40	.34	.29	.27
8.0	.43	.34	.28	.42	.34	.28	.40	.33	.27	.38	.32	.27	.36	.30	.26	.24
9.0	.40	.31	.25	.39	.31	.25	.37	.30	.25	.35	.29	.24	.34	.28	.23	.22
10.0	.36	.28	.23	.36	.28	.23	.34	.27	.22	.33	.26	.22	.31	.25	.21	.19

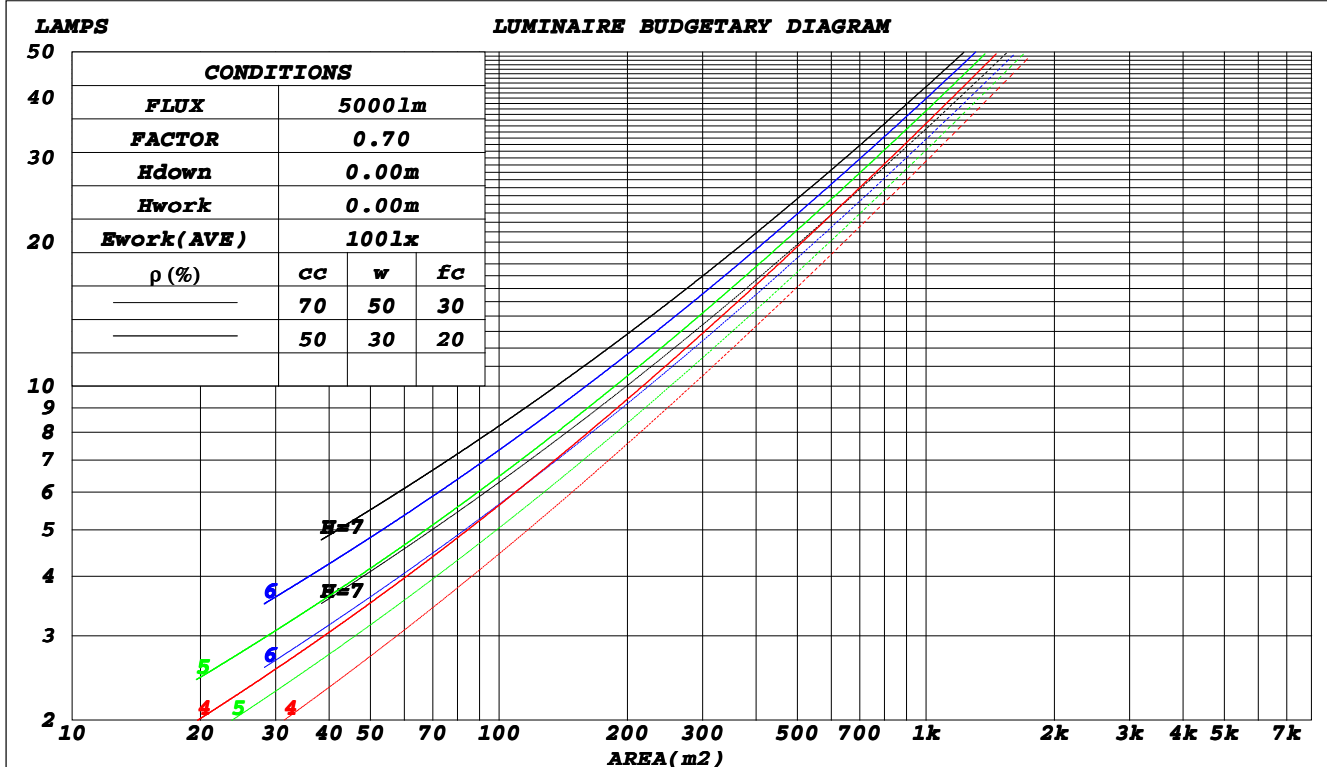

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2019-05-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks: LF-GIR030YI0750H, D320-10S9P-V1.1

WEC AND CCEC

Test:U:221.70V I:0.1130A P:23.700W PF:0.9440 Freq:50.00Hz Lamp Flux:2536.56x1 lm					
NAME: D320 24W 000 4000K			TYPE:圆柱形		
MFR.:			DIM.: φ320*94mm		
			SUR.:φ320mm		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.365	.208	.066	.356	.203	.064	.337	.193	.062	.320	.185	.059	.305	.177	.057	
2.0	.322	.177	.054	.314	.173	.053	.297	.165	.051	.282	.158	.050	.268	.152	.048	
3.0	.289	.154	.046	.282	.151	.045	.267	.145	.044	.253	.139	.043	.240	.133	.041	
4.0	.262	.136	.040	.255	.134	.039	.242	.128	.038	.230	.123	.037	.218	.119	.036	
5.0	.239	.122	.035	.233	.120	.035	.221	.115	.034	.210	.111	.033	.200	.107	.032	
6.0	.220	.110	.032	.214	.108	.031	.204	.104	.030	.194	.101	.030	.184	.097	.029	
7.0	.204	.101	.029	.198	.099	.028	.189	.095	.027	.180	.092	.027	.171	.089	.026	
8.0	.189	.092	.026	.185	.091	.026	.176	.088	.025	.167	.085	.024	.159	.082	.024	
9.0	.177	.085	.024	.172	.084	.024	.164	.081	.023	.157	.079	.022	.149	.076	.022	
10.0	.166	.079	.022	.162	.078	.022	.154	.076	.021	.147	.073	.021	.141	.071	.020	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.255	.255	.255	.218	.218	.218	.149	.149	.149	.086	.086	.086	.027	.027	.027	
1.0	.250	.221	.195	.214	.190	.168	.146	.131	.116	.084	.076	.068	.027	.024	.022	
2.0	.242	.198	.160	.207	.170	.138	.142	.118	.097	.082	.068	.057	.026	.022	.018	
3.0	.234	.181	.138	.201	.156	.119	.138	.108	.084	.080	.063	.049	.026	.021	.016	
4.0	.227	.168	.123	.194	.145	.107	.134	.101	.075	.077	.059	.044	.025	.019	.015	
5.0	.219	.158	.113	.188	.136	.098	.129	.095	.069	.075	.056	.041	.024	.018	.014	
6.0	.211	.149	.105	.182	.129	.092	.125	.091	.065	.073	.053	.038	.023	.017	.013	
7.0	.204	.143	.100	.176	.124	.087	.121	.087	.062	.071	.051	.037	.023	.017	.012	
8.0	.198	.137	.095	.170	.119	.083	.118	.083	.059	.068	.049	.035	.022	.016	.012	
9.0	.191	.132	.092	.165	.115	.080	.114	.081	.057	.067	.048	.034	.022	.016	.011	
10.0	.186	.128	.090	.160	.111	.078	.111	.078	.056	.065	.046	.033	.021	.015	.011	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-05-22

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: LF-GIR030YI0750H,D320-10S9P-V1.1

UGR(Unified Glare Rating) Table

Test:U:221.70V I:0.1130A P:23.700W PF:0.9440 Freq:50.00Hz Lamp Flux:2536.56x1 lm										
NAME: D320 24W 000 4000K					TYPE:圆柱形					
MFR.:					DIM.: φ320*94mm					
					SUR.:φ320mm					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.2	20.6	19.6	21.0	21.4	19.1	20.6	19.5	20.9	21.3
3H	21.1	22.5	21.5	22.9	23.3	21.0	22.4	21.5	22.8	23.2
4H	22.1	23.4	22.6	23.8	24.3	22.0	23.3	22.5	23.7	24.2
6H	23.2	24.4	23.7	24.9	25.3	23.1	24.3	23.6	24.7	25.2
8H	23.8	25.0	24.3	25.4	25.9	23.7	24.8	24.1	25.3	25.8
12H	24.4	25.6	24.9	26.0	26.5	24.3	25.4	24.8	25.9	26.4
4H 2H	19.8	21.1	20.3	21.5	22.0	19.8	21.1	20.2	21.5	21.9
3H	22.0	23.1	22.5	23.6	24.1	21.9	23.1	22.4	23.5	24.0
4H	23.2	24.2	23.7	24.7	25.2	23.1	24.2	23.6	24.6	25.1
6H	24.4	25.4	25.0	25.9	26.4	24.3	25.3	24.9	25.8	26.3
8H	25.1	26.0	25.7	26.5	27.1	25.0	25.9	25.6	26.4	27.0
12H	25.9	26.7	26.5	27.2	27.8	25.8	26.6	26.3	27.1	27.7
8H 4H	23.6	24.5	24.2	25.0	25.6	23.6	24.4	24.1	25.0	25.5
6H	25.2	25.9	25.7	26.5	27.1	25.1	25.8	25.6	26.4	27.0
8H	26.0	26.7	26.6	27.3	27.9	25.9	26.6	26.5	27.1	27.8
12H	27.0	27.6	27.6	28.2	28.8	26.9	27.5	27.5	28.0	28.7
12H 4H	23.7	24.5	24.3	25.1	25.7	23.7	24.5	24.2	25.0	25.6
6H	25.3	26.0	25.9	26.6	27.2	25.3	25.9	25.8	26.5	27.1
8H	26.3	26.9	26.9	27.5	28.1	26.2	26.8	26.8	27.4	28.0
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 2537 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 3.2$)

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2019-05-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks: LF-GIR030YI0750H, D320-10S9P-V1.1

UTILIZATION FACTORS TABLE

Test:U:221.70V I:0.1130A P:23.700W PF:0.9440 Freq:50.00Hz Lamp Flux:2536.56x1 lm		
NAME: D320 24W 000 4000K	TYPE:圆柱形	
MFR.:	DIM.: $\phi 320 \times 94\text{mm}$	
	SUR.: $\phi 320\text{mm}$	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	52	40	33	51	40	33	50	39	33	26
0.80	62	49	42	60	49	41	58	48	41	33
1.00	70	57	49	68	57	49	65	58	48	40
1.25	77	65	57	75	64	56	71	62	55	47
1.50	82	70	62	79	69	62	76	67	60	51
2.00	89	78	71	86	77	70	82	74	68	58
2.50	93	84	76	90	82	75	85	78	72	62
3.00	96	88	81	94	86	80	88	82	77	66
4.00	101	94	88	98	91	86	92	87	82	71
5.00	104	97	92	100	95	90	94	90	86	74
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: LF-GIR030YI0750H,D320-10S9P-V1.1

ISOCANDELA DIAGRAM

Test:U:221.70V I:0.1130A P:23.700W PF:0.9440 Freq:50.00Hz Lamp Flux:2536.56x1 lm		
NAME: D320 24W 000 4000K	TYPE:圆柱形	
MFR.:	DIM.: $\phi 320 \times 94\text{mm}$	
	SUR.: $\phi 320\text{mm}$	

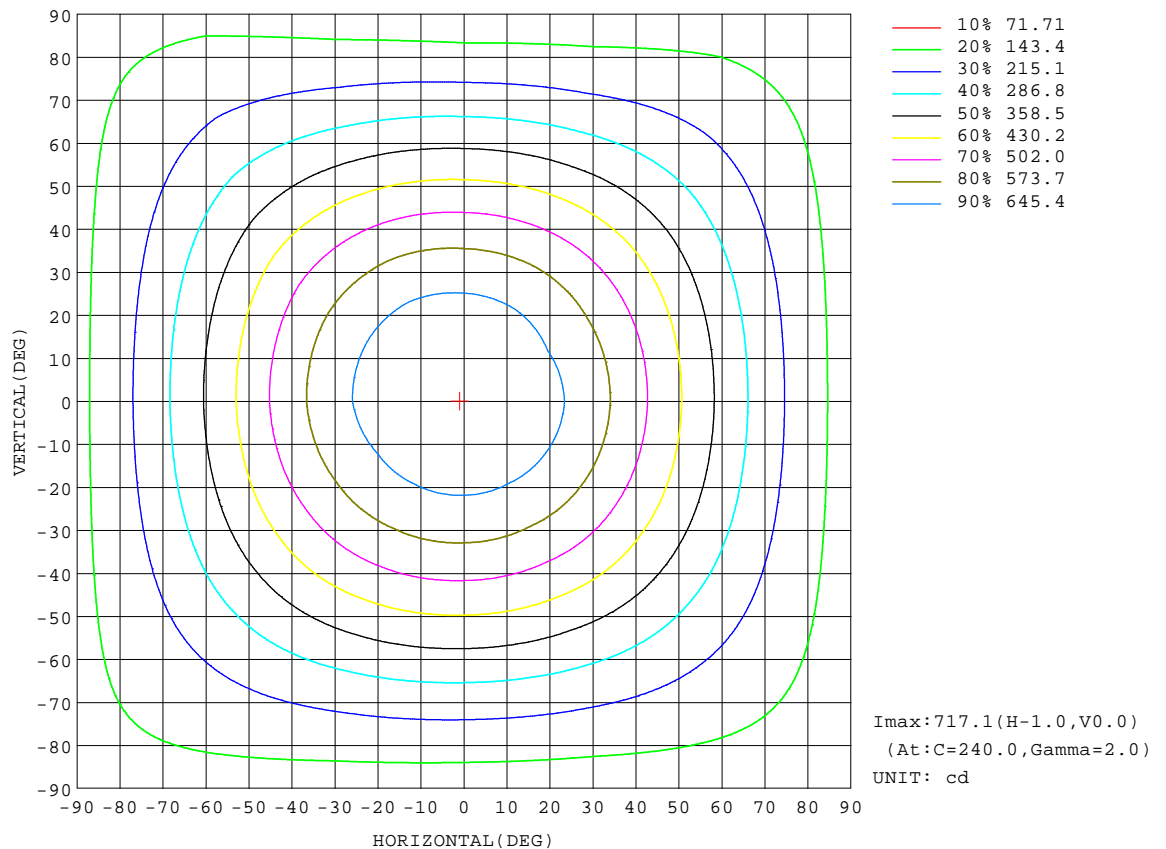


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: LF-GIR030YI0750H, D320-10S9P-V1.1

AAI Figure

Test:U:221.70V I:0.1130A P:23.700W PF:0.9440 Freq:50.00Hz Lamp Flux:2536.56x1 lm		
NAME: D320 24W 000 4000K	TYPE:圆柱形	
MFR.:	DIM.: $\phi 320 \times 94\text{mm}$	
	SUR.: $\phi 320\text{mm}$	

Flux out:1607 lm

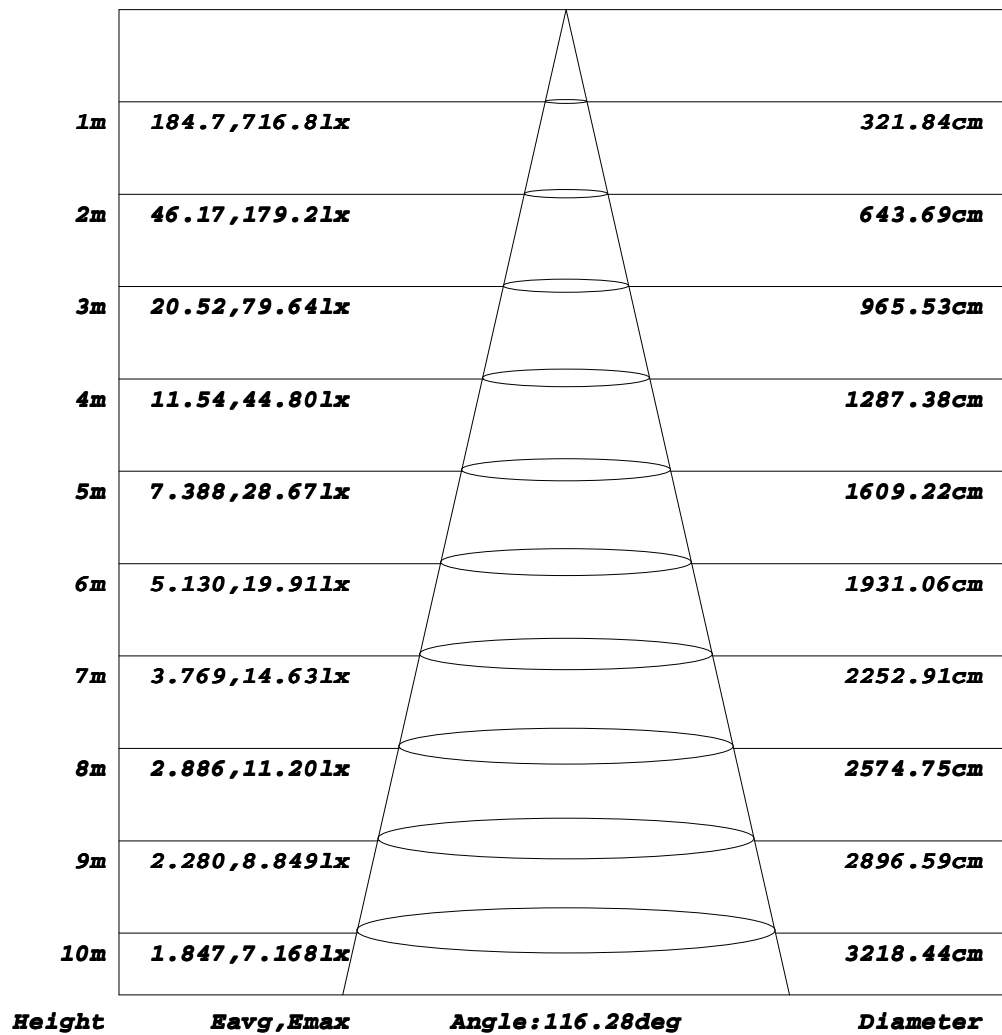


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: DAMIN
 Test Date: 2019-05-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
 Humidity: 65.0%
 Test Distance: 8.000m [K=0.7063]
 Remarks: LF-GIR030YI0750H, D320-10S9P-V1.1

ISOLUX DIAGRAM


Test:U:221.70V I:0.1130A P:23.700W PF:0.9440 Freq:50.00Hz Lamp Flux:2536.56x1 lm		
NAME: D320 24W 000 4000K	TYPE:圆柱形	
MFR.:	DIM.: $\phi 320 \times 94\text{mm}$	
	SUR.: $\phi 320\text{mm}$	

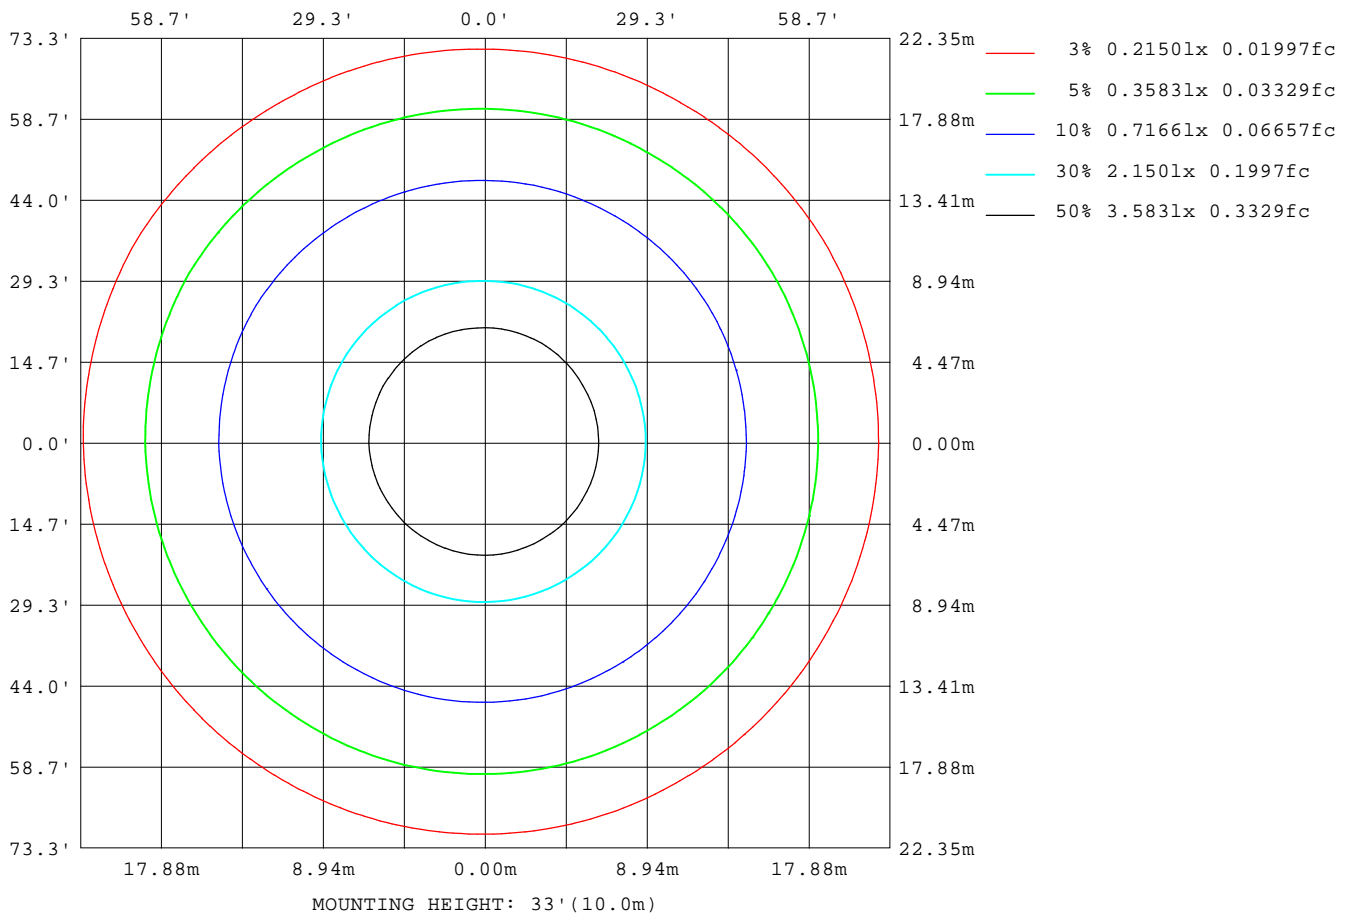

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: LF-GIR030YI0750H, D320-10S9P-V1.1

Planar Illuminance Curve

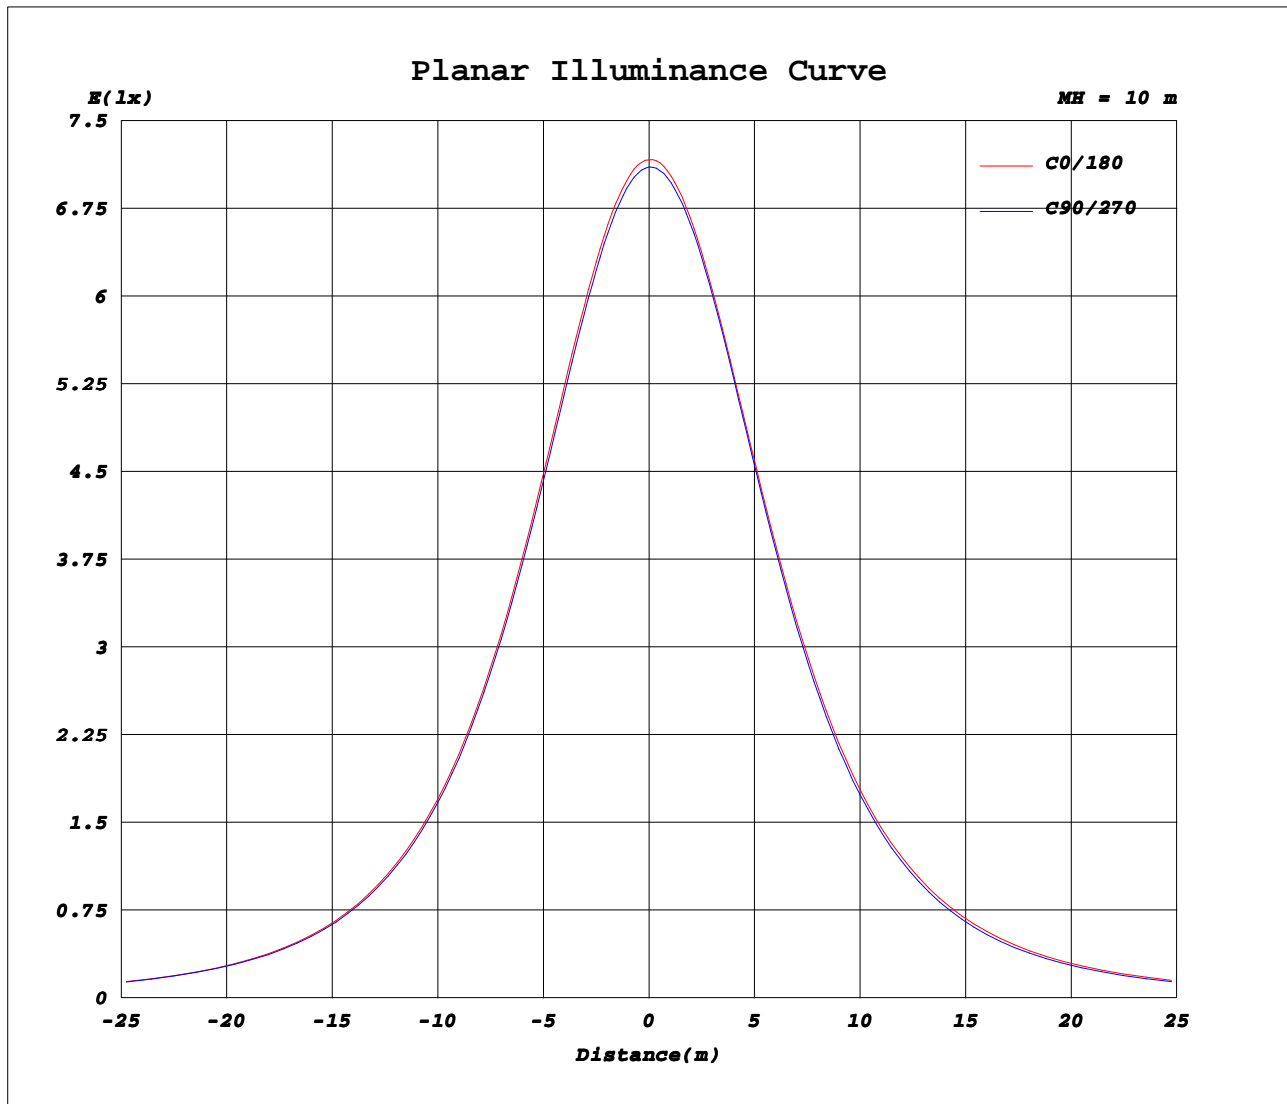

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: DAMIN
Test Date: 2019-05-22

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity: 65.0%
Test Distance: 8.000m [K=0.7063]
Remarks: LF-GIR030YI0750H,D320-10S9P-V1.1

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.70V I:0.1130A P:23.700W PF:0.9440 Freq:50.00Hz Lamp Flux:2536.56x1 lm		
NAME: D320 24W 000 4000K	TYPE:圆柱形	
MFR.:	DIM.: φ320*94mm	
	SUR.:φ320mm	

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330							
0	712	712	712	712	712	712	712	712	712	712	712	712							
5	707	706	705	706	708	709	710	710	711	710	710	708							
10	697	695	694	695	698	700	703	704	705	703	703	698							
15	681	677	676	678	682	686	690	691	693	691	689	683							
20	659	655	653	656	660	666	670	673	675	672	670	663							
25	631	627	626	628	633	641	646	650	651	647	645	637							
30	600	595	592	597	602	610	616	621	621	615	613	606							
35	562	558	554	559	565	575	581	587	586	578	576	570							
40	522	517	513	519	525	535	543	548	545	537	535	530							
45	478	472	469	474	481	492	501	506	500	492	490	487							
50	433	427	424	429	436	447	456	461	454	445	443	441							
55	387	380	378	382	389	400	408	414	403	396	393	394							
60	339	334	332	336	342	353	361	366	354	346	343	347							
65	294	289	288	291	297	306	315	320	306	298	296	300							
70	251	246	245	248	254	263	271	275	259	252	249	257							
75	210	207	204	208	212	222	229	234	216	207	207	216							
80	173	171	167	172	174	184	191	194	176	167	168	178							
85	140	137	134	137	141	149	156	159	142	132	134	144							
90	109	108	105	107	111	119	124	127	115	101	107	114							
95	75.2	83.2	79.7	75.5	84.9	92.2	96.5	99.5	90.2	79.0	83.2	87.8							
100	53.2	60.3	59.3	52.5	63.8	69.5	62.1	75.9	69.5	58.5	63.3	65.9							
105	35.6	42.0	42.7	39.0	46.3	50.2	47.0	56.5	52.8	45.2	47.3	48.2							
110	25.2	30.1	30.3	28.8	33.1	35.6	34.8	41.0	39.0	34.0	34.6	34.6							
115	17.7	22.2	23.6	21.7	24.0	25.5	26.1	29.6	29.1	25.6	25.9	25.2							
120	15.8	17.6	17.4	17.1	18.5	19.1	20.3	22.4	22.7	20.1	23.2	19.7							
125	14.0	14.7	14.8	16.6	15.4	15.8	16.6	18.1	18.6	16.6	16.9	16.3							
130	13.0	13.3	13.4	15.2	13.6	13.9	14.7	15.5	15.9	14.6	14.8	14.5							
135	12.9	13.0	19.1	12.6	12.9	13.1	13.8	14.3	14.5	13.7	13.8	13.8							
140	13.2	13.2	13.1	12.9	13.1	13.2	13.7	13.9	14.0	13.8	13.5	13.7							
145	13.7	13.6	13.4	13.4	13.5	13.6	14.0	14.2	14.1	14.3	14.0	14.0							
150	14.2	14.1	13.9	13.9	14.0	14.1	14.4	14.4	14.7	14.8	14.5	14.4							
155	14.7	14.6	14.4	14.6	14.6	14.7	15.0	14.9	15.1	15.2	15.0	14.9							
160	15.1	15.2	15.0	15.2	15.2	15.2	15.4	15.3	15.6	15.7	15.5	15.4							
165	15.7	15.5	15.5	15.8	15.8	15.7	15.8	15.8	16.1	16.1	15.9	15.9							
170	16.0	16.0	16.0	16.3	16.2	16.2	16.0	16.2	16.4	16.5	16.4	16.3							
175	16.2	16.3	16.3	16.5	16.5	16.5	16.2	16.3	16.4	16.7	16.6	16.5							
180	16.3	16.4	16.4	16.8	16.6	16.6	16.3	16.3	16.4	16.8	16.6	16.5							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:DAMIN
Test Date:2019-05-22

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.406.11
Humidity:65.0%
Test Distance:8.000m [K=0.7063]
Remarks: LF-GIR030YI0750H,D320-10S9P-V1.1