




Orion is a design and customizable pendant luminaire, for a mid-height installation such as reception halls, counters or restaurants.



- 1
- Spun aluminum lamp body with matt finish. Optional container: (1) aluminum reflector container with interchange colour reflector, or (2) PC prismatic reflector container.
- 2
- Optional COB version
 - Optional E27 version
- 3
- Multiple color selections
 - Flexible collocations

Part Name	Lamp Body + Ceiling Accessory	Aluminum Reflector Container	Interchangeable Colored Reflector	PC Prismatic Reflector Container
Picture				
Colour				
Black RAL9005				
Grey RAL7045				
White RAL9003				
Copper RAL1005				
Transparent				

Dimension

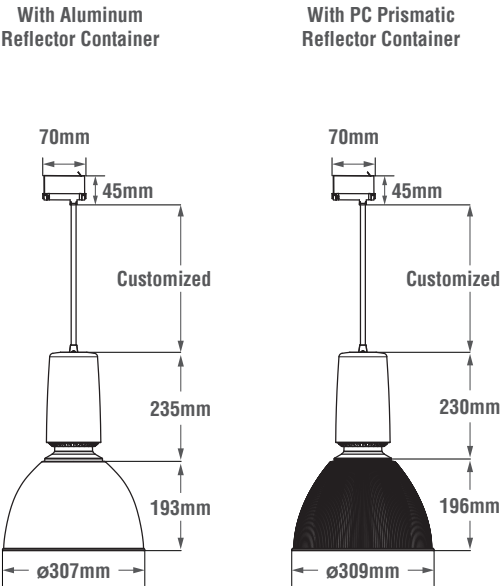

Photometrics

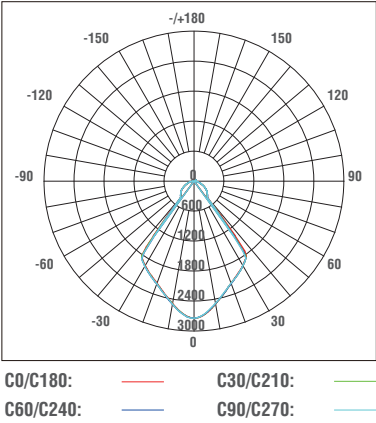

Lumen Output

Model	Reflector	Power	3000K	4000K	5000K
			85 lm/W	90 lm/W	95 lm/W
O300	Aluminum	20W	1805 lm	1935 lm	1955 lm
O300	Aluminum	40W	3490 lm	3740 lm	3780 lm
O300	PC Prismatic	20W	2110 lm	2240 lm	2260 lm
O300	PC Prismatic	40W	4150 lm	4410 lm	4452 lm

• Lumen may fluctuate between ± 10%. Customized higher lumen output available.

Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	80°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP43
Fitting Material	Aluminum / PC

Electrical Class	I
20W Lifespan	L70B50: 156,000h L80B10: 75,000h
40W Lifespan	L70B50: 142,000h L80B10: 74,000h
Standard	EN60598-2-1 / EN55015 / EN62778

Order Code

• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
ORI001	O300	20W						●			40K	N/A	H 428 * Ø 309
ORI002	O300	40W	●								30K	N/A	H 428 * Ø 309
ORI008	O300	40W	●								40K	90 lm/W	H 428 * Ø 309