


RECESSED LIGHT




Aries is a new type of panel light, with three replaceable modular lighting sources that provide high-efficiency and low-glare light. In between, the panel is white and blends nicely into a white ceiling.


Dimension

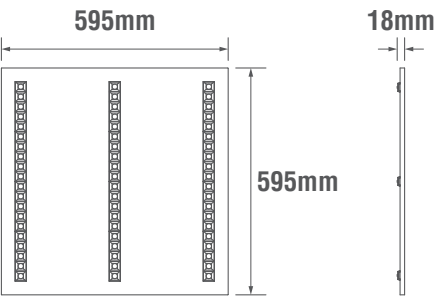



(Rectangle version is also available)

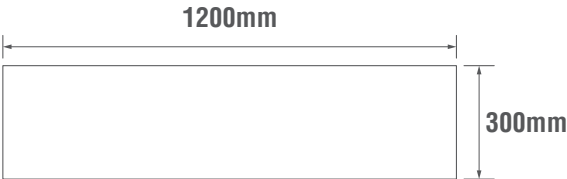

Photometrics

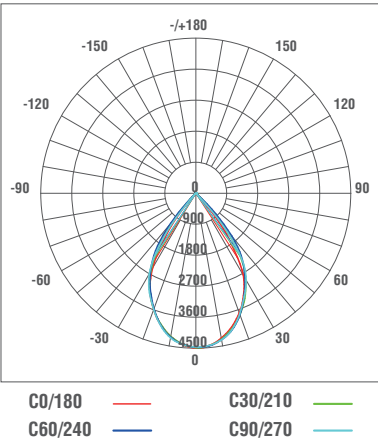

RECESSED LIGHT

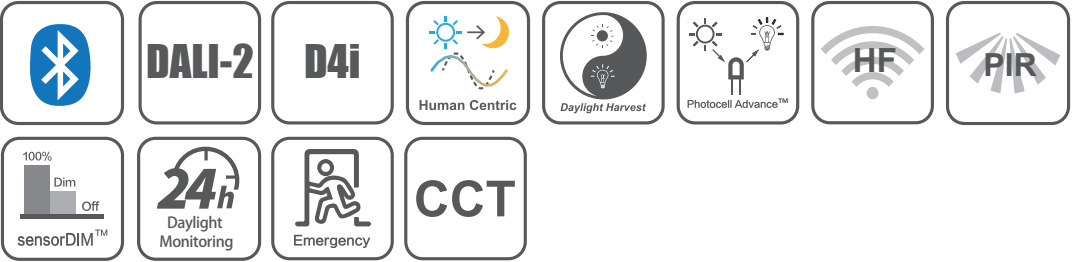

Lumen Output

Model	UGR	Power	4000K
			130 lm/W
A6060	12	36W	4601 lm

• Lumen may fluctuate between ± 10%. Customized higher lumen output available.

Specification

Input Voltage	220-240VAC
CRI	>80
Power Factor	>0.9
SDCM	3
Beam Angle	70°
Operation Temp.	-20°C ~ +40°C
IP Rating	IP20


Fitting Material	PVC
Electrical Class	II
Lifespan	L70B50: 76,000h
Standard	EN60598-2-1 / EN55015 / EN62778 / EN60598-2-22
Emergency Lumen	200 ~ 400 lm
Battery	3h Duration

Order Code


• Subject to change without notice. Please scan the QR code for complete code list.

Code	Model	Power	On/Off	Microwave	PIR	BT	EME	DAL	RFD	RFM	CCT	Efficiency	Dimension (mm)
ARI001	A6060	36W	●								40K	130 lm/W	595*595*50

Aries A6060 With Quick Connect System

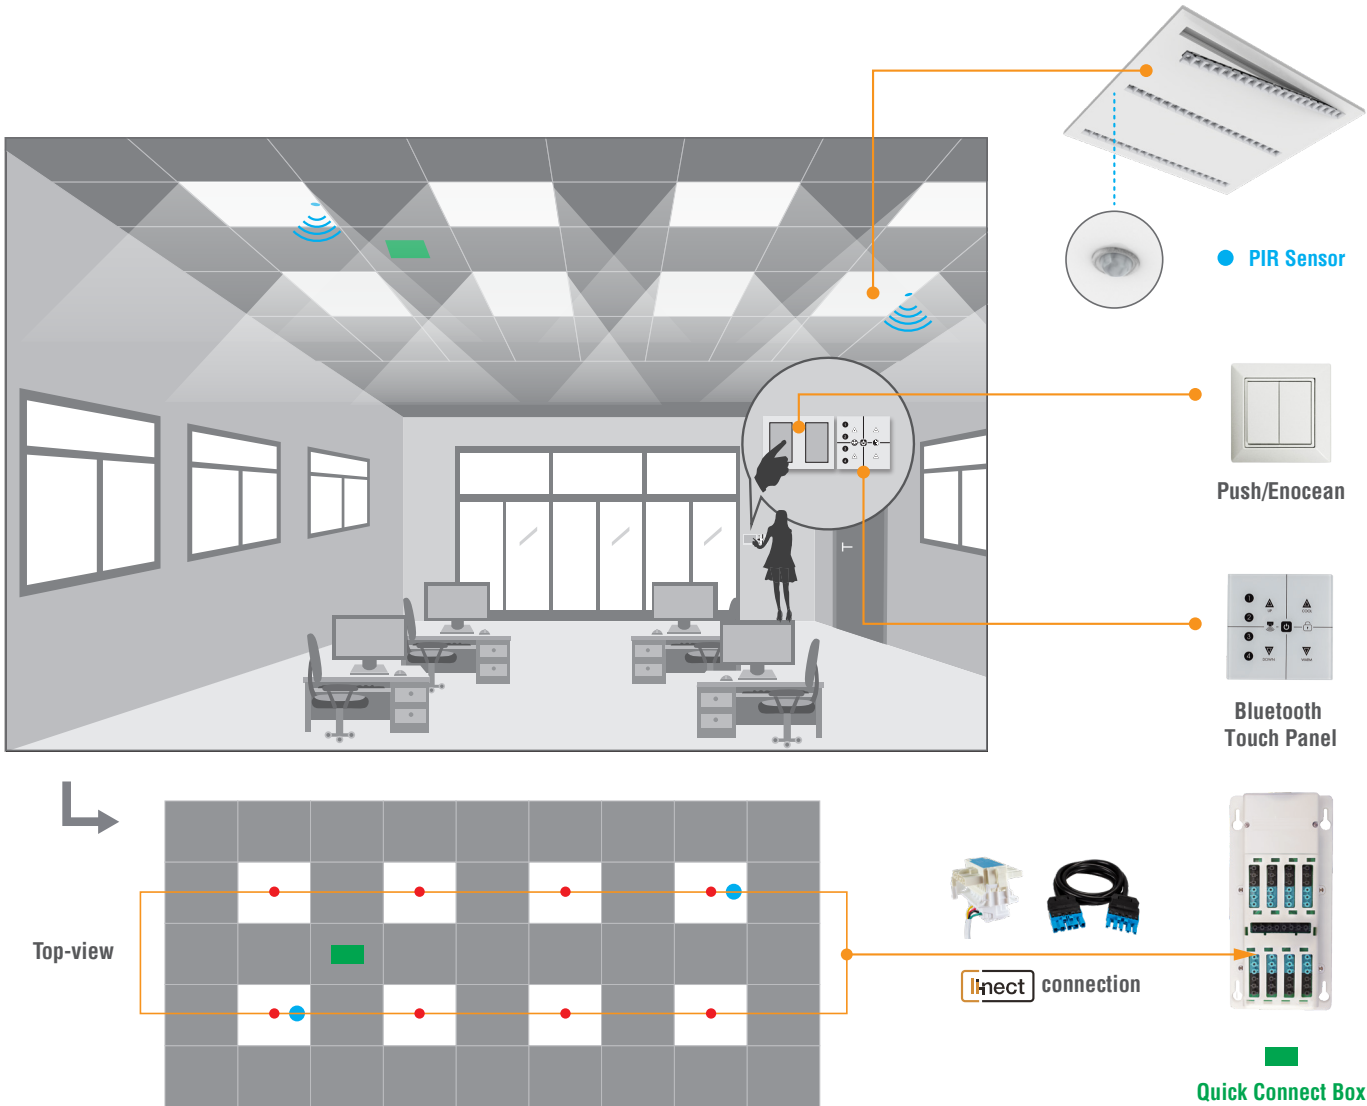


Bluetooth Touch Panel

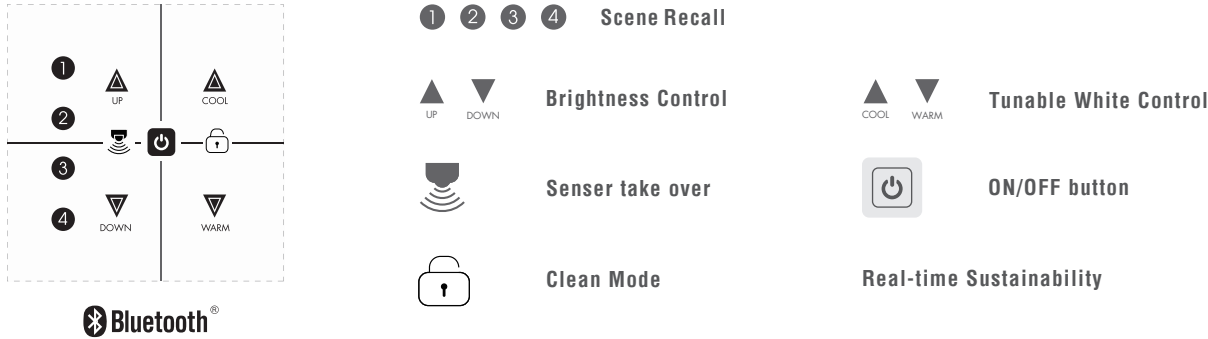


Linect Connection

Connecting to Linect System, universal for recessed luminaires

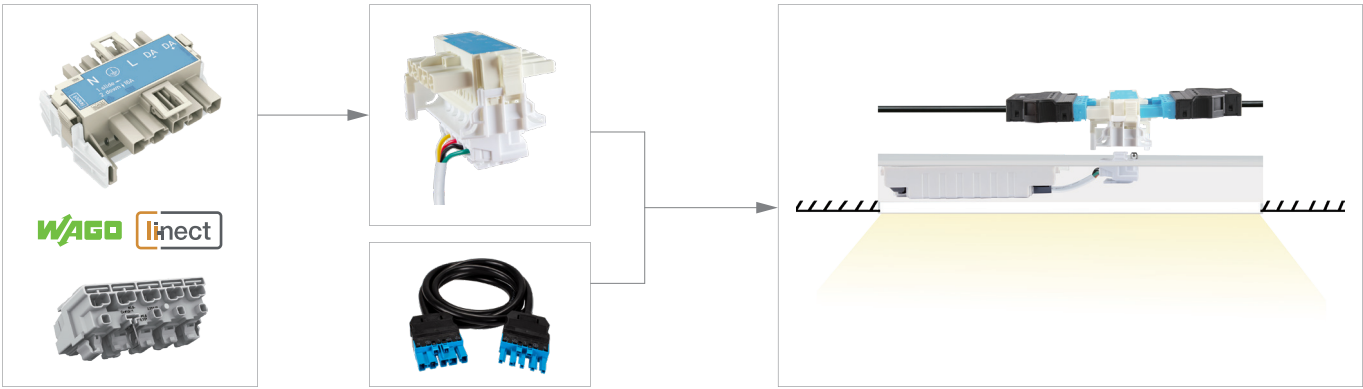


Quick Connect Box

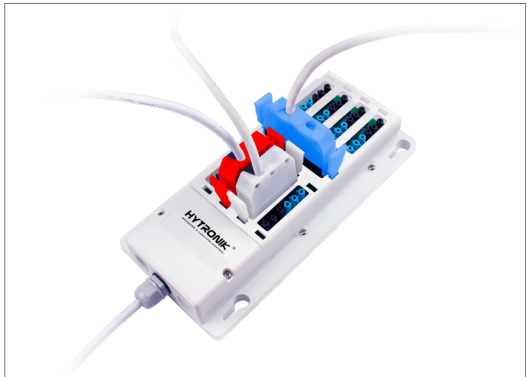

Quick Connect Boxes (QCB series) belong to Bluetooth 5.0 SIG Mesh Eco-system. They help simplify wiring processes on project sites, making it extremely simple and intuitive for installers and project managers by easy plug' n' play connections.

Quick Connect Boxes together with cables and plugs, ceiling rose components, and a wide range of sensor/controller selections, constitute the Modular Wiring System. This significantly saves the labor cost, minimizes installation time, improves safety level during operations, and also simplifies future upgrade & maintenance.

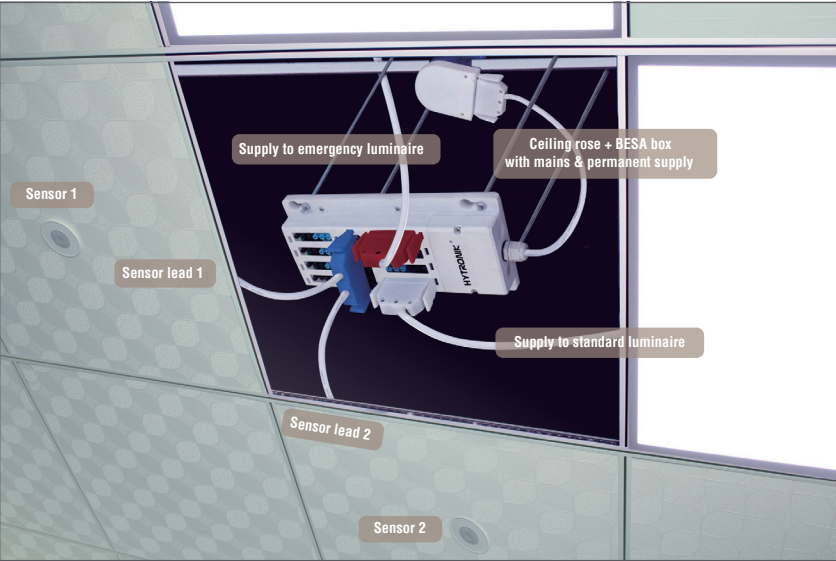

Modular Wiring System Overview