

MOON M320



White
RAL9003

Grey
RAL9006



● Features & Benefits


Moon is an elegant PC luminaire that is ideal for setting up in publicly accessible areas, such as circulation spaces, stairwells, hallways, passageways, metro and train stations, but can also be used in institutions and schools, residential areas.

- Reserved BESA holes, Key holes • Cable entry from side and back • Through wiring from side to side
- IP54 water-proof • IK10 vandal-proof
- Optional selectable power
- Ceiling/wall mounted, or installed in suspension • PC Mounting box is optional, no need to open fixture
- Wide choice of intelligent functions, with/without Bluetooth, sensor, emergency, DALI, etc.


● Function



● Dimensions

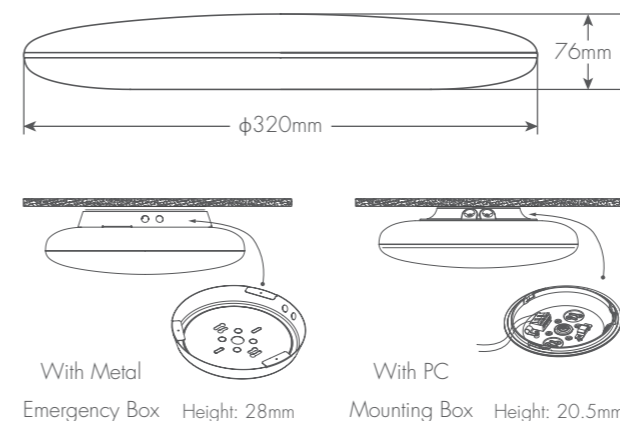

● Photometrics

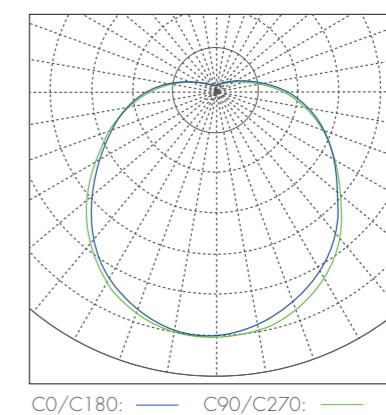

● Lumen Output

Model	Power	Colour Temp.			Lumen Efficiency
		3000K	4000K	5000K	
M320	12W	1050lm	1110lm	1130lm	(±10%)
M320	18W	1530lm	1580lm	1660lm	(±10%)
M320	28W	2550lm	2700lm	2750lm	(±10%)

• Customized higher lumen output available

● Specification

Input Voltage	CRI	Power Factor	SDCM	Beam Angle	Operation Temp.	IP/IK	Fitting Material	Class
220~240VAC	>80	>0.9	3	120°	-20°C~+40°C	IP54/IK10	Polycarbonate	II

Standard Lifespan	Premium Lifespan	Standard	Emergency Lumen	Battery
L70B50: 50,000h	L70B50: 103,000h / L80B10: 54,000h	EN60598-2-1/EN55015/EN62778/EN60598-2-22	200lm~400lm	3h Duration

Carton (L x W x H)	QTY/CTN	QTY/20'GP	QTY/40'GP	QTY/40'HQ
42.8 x 34.3 x 35 cm	4 pcs	1944 PCS / 486 CTNS	4280 PCS / 1070 CTNS	4824 PCS / 1206 CTNS